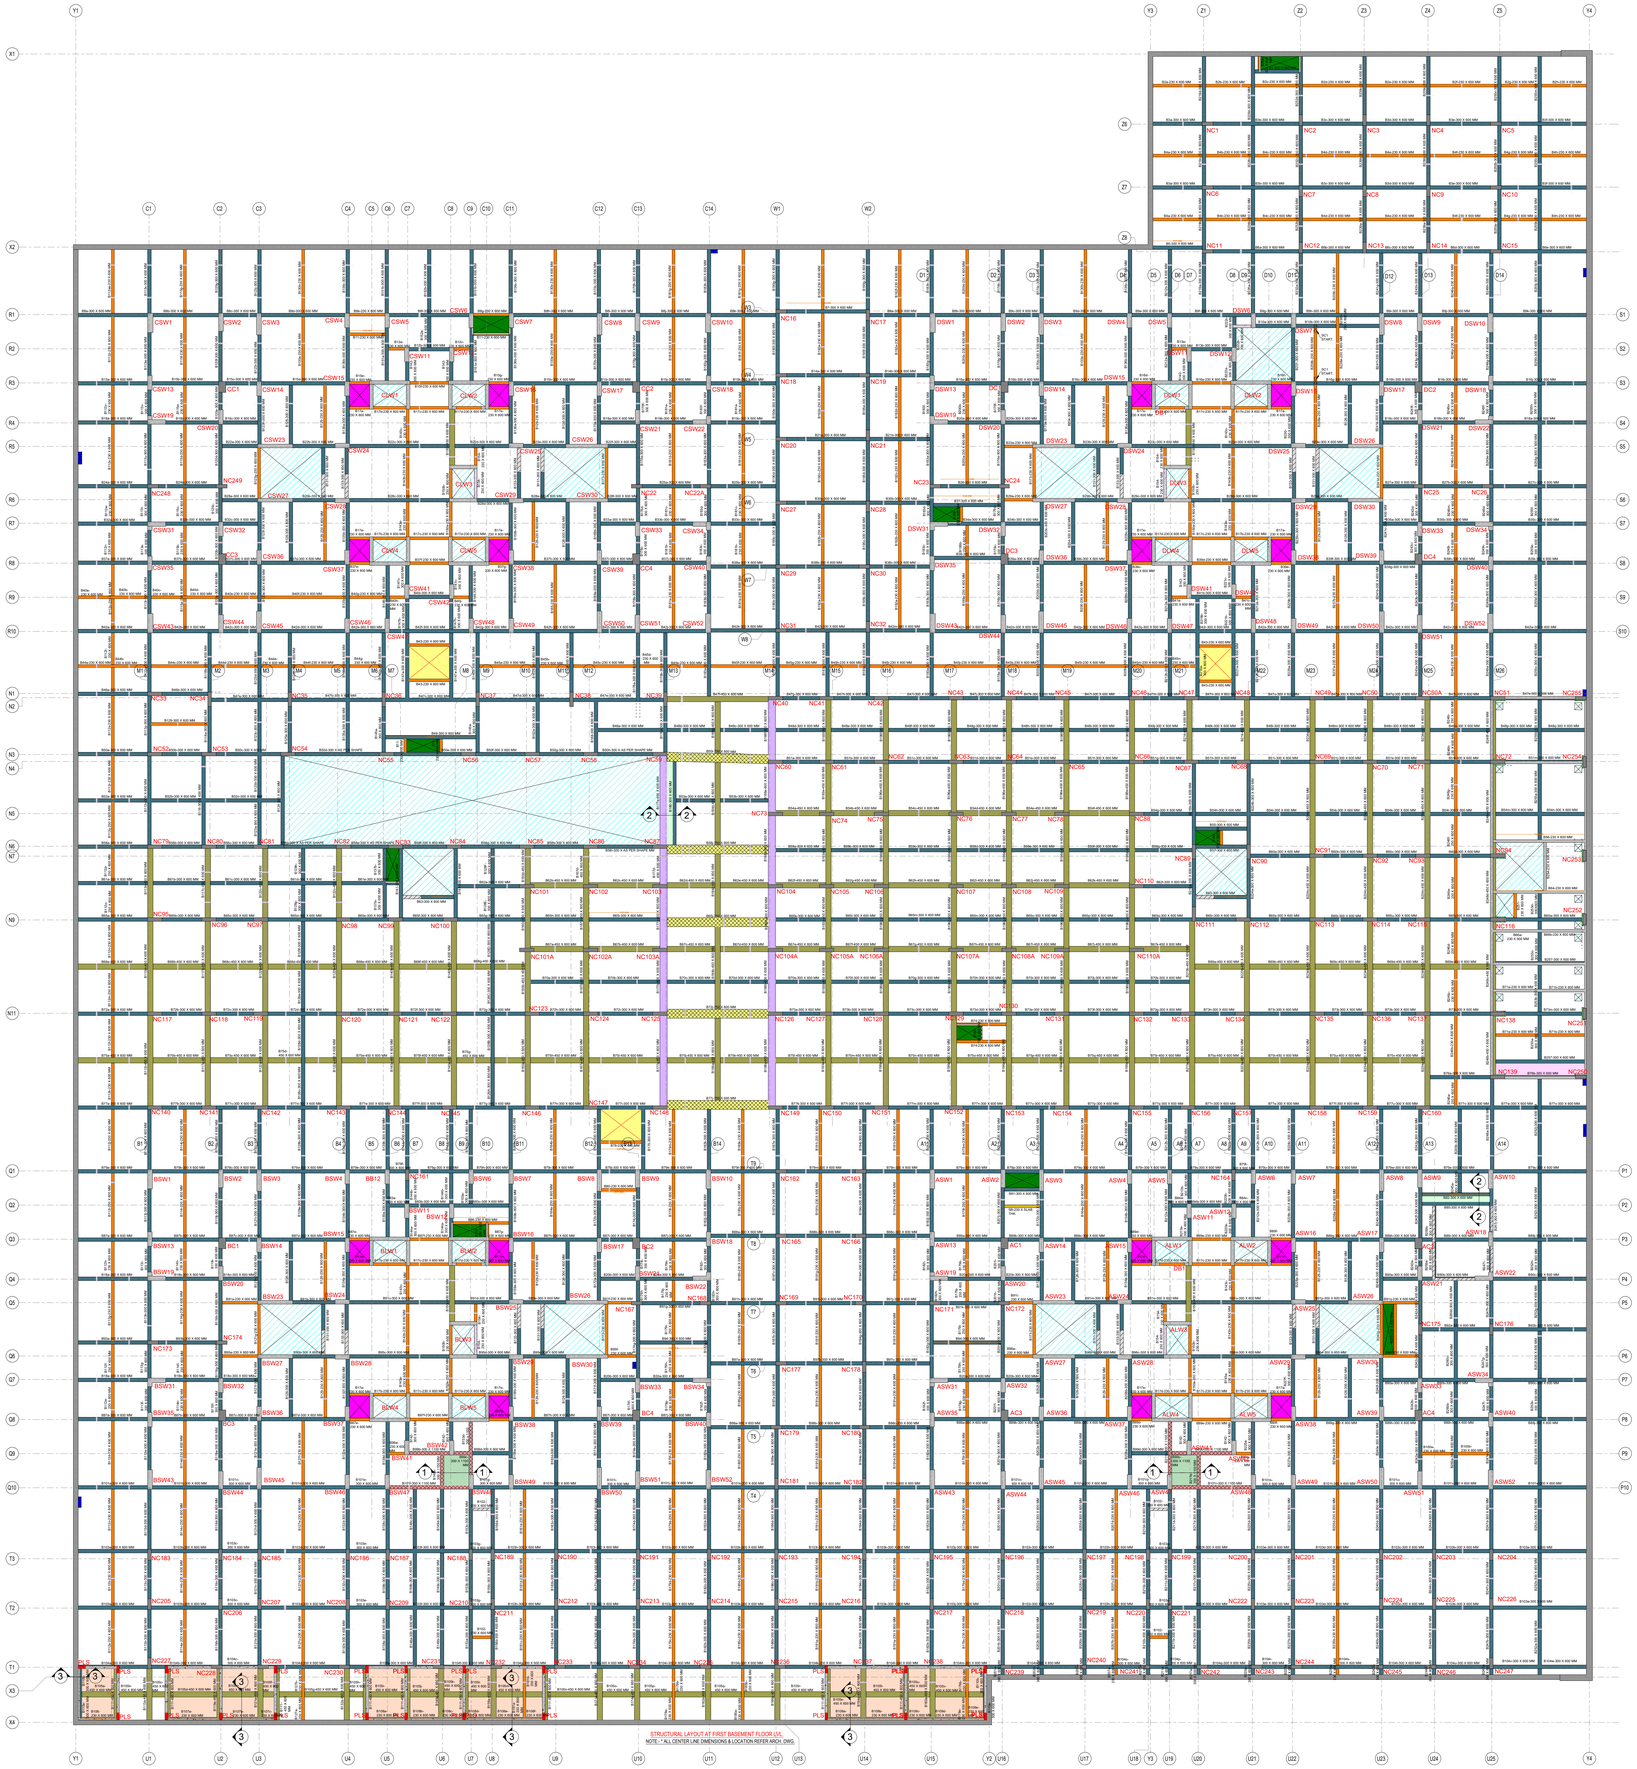

STRUCTURAL LAYOUT AT FIRST BASEMENT FLOOR LVL
NOTE : * ALL CENTER LINE DIMENSIONS & LOCATION REFER ARCH. DWG.

1. ALL DIMENSIONS AND LEVELS ARE IN MM.
2. T – INDICATES TMT HIGH YIELD STRENGTH DEFORMED BARS CONFIRMING TO IS:1786 OR EQUIVALENT WITH 0.2% PROOF STRESS OF 550 N/mm².
3. ALL DIMENSIONS & LEVELS SHALL BE CHECKED WITH ARCHITECTURAL DRAWINGS. ANY AMBIGUITY, IF FOUND, SHALL BE BROUGHT TO THE NOTICE
4. OF THE CONSULTANTS BEFORE EXECUTION OF THE WORK.
5. SUPERVISION SHALL NOT BE OUR RESPONSIBILITY.
6. CURING OF CONCRETE MEMBERS SHALL BE CARRIED OUT FOR A MINIMUM PERIOD OF 12 DAYS AFTER CASTING BY PONDING OR COVERING SURFACE BY JUTE BAGS KEPT CONSTANTLY WET OR SUCH OTHER MEANS.
7. CONTRACTOR SHALL TAKE CARE OF ALL UNDER GROUND UTILITIES OF CIVIL, MECHANICAL, ELECTRICAL AND OTHER SERVICES AS THEY
8. INTERFACE WITH STRUCTURAL FOUNDATIONS AND OTHER UNDERGROUND WORKS.
9. SAND/EARTH FILLING SHALL BE DONE SIMULTANEOUSLY BOTH SIDE OF WALL.
10. LAP LENGTH SHALL BE 50 TIMES DIA. OF BARS.

KEY PLAN

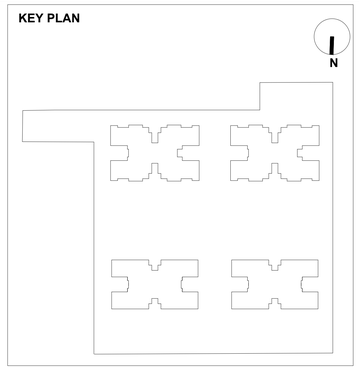

GOOD FOR CONSTRUCTION
ISSUED ON DATE:19/03/2025

GRADE OF CONCRETE MIX= M35
GRADE OF STEEL= FE550D

PRINTS ISSUED

DATE	REV.	ARCH	CLIENT	SITE	CONSL.	CONTR.	OFFICE	TOTAL	REMARK
10.03.2025	R0	MAIL	–	–	–	–	01	01	APP.
19.03.2025	R0	MAIL	–	–	–	–	01	01	GFC.

NO	DATE	REVISION	BY	DR	CH

CUT OUT / SHAFT
PLUMBING CUTOUT
ELECTRICAL CUT OUT
HVAC CUTOUT

CLEAR HEIGHT 3900MM FROM -10000 SSL (150 MM THK SLAB)
CLEAR HEIGHT 3400MM FROM -10000 SSL (200 MM THK SLAB)
CLEAR HEIGHT 4300MM FROM -10000 SSL (200 MM THK SLAB)
CLEAR HEIGHT 3900MM FROM -10000 SSL (115X600 MM BEAM)
CLEAR HEIGHT 3900MM FROM -10000 SSL (230X600 MM BEAM)
CLEAR HEIGHT 3900MM FROM -10000 SSL (300X600 MM BEAM)
CLEAR HEIGHT 3900MM FROM -10000 SSL (450X600 MM BEAM)
CLEAR HEIGHT 3900MM FROM -10000 SSL (600X600 MM BEAM)
CLEAR HEIGHT 3900MM FROM -10000 SSL (750X600 MM BEAM)
CLEAR HEIGHT 3400MM FROM -10000 SSL (300X1100 MM BEAM)
SLAB BEAM AS PER DETAIL
NON STRUCTURAL WALL
CRANE CUTOUT

NOTE:
1) HEIGHT IS MEASURED FROM EFFECTIVE FLOOR SSL TOP TO ABOVE FLOOR / BEAM SSL BOTTOM.
2) LEVELS ARE MEASURED FROM GROUND SSL ±0.0LVL TO RESPECTIVE SSL BOTTOM.
3) FOR BASEMENT-2 LEVEL RCP HT. TO BE MEASURED FROM -1000 SSL.
4) FOR BEAMS @ LIFT WELL AREA, RAMP & STAIRCASE TO BE REFERRED FROM STRUCTURE.DWG / ENLARGE DETAIL.
5) FOR SLAB BEAM LOCATION & DT. REFER STRUCTURE DWG.
6) FOR MEPF SERVICES CORE-CUT IN SLAB TO BE DONE FOR DOWN TAKE PIPE AS PER REQUIREMENT.

ARCHITECT :
mansi shah ARCHITECTS

JOB TITLE
TROGON CENTRE COURT

DRAWING TITLE
STRUCTURAL LAYOUT AT 1ST BASEMENT LVL.

JOB NO	DATE	SHEET SIZE	SCALE	
2207023	10.03.2025	A0	1:180	
DRG. NO.	REVISION	DRAWN	DESIGN	CHECKED
S-301	R0	RSS	RS/KN	NKP

STRUCTURAL CONSULTANT

HNBS

HNBS DESIGN STUDIO

1007, TIMES SQUARE ARCADE 1,
NEAR RAVIJA PLAZA,OPPOSITE
RAMBAG,THALTEJ,SHILAJ,
AHMEDABAD, 380059,
E mail: contact@hnbs.co.in