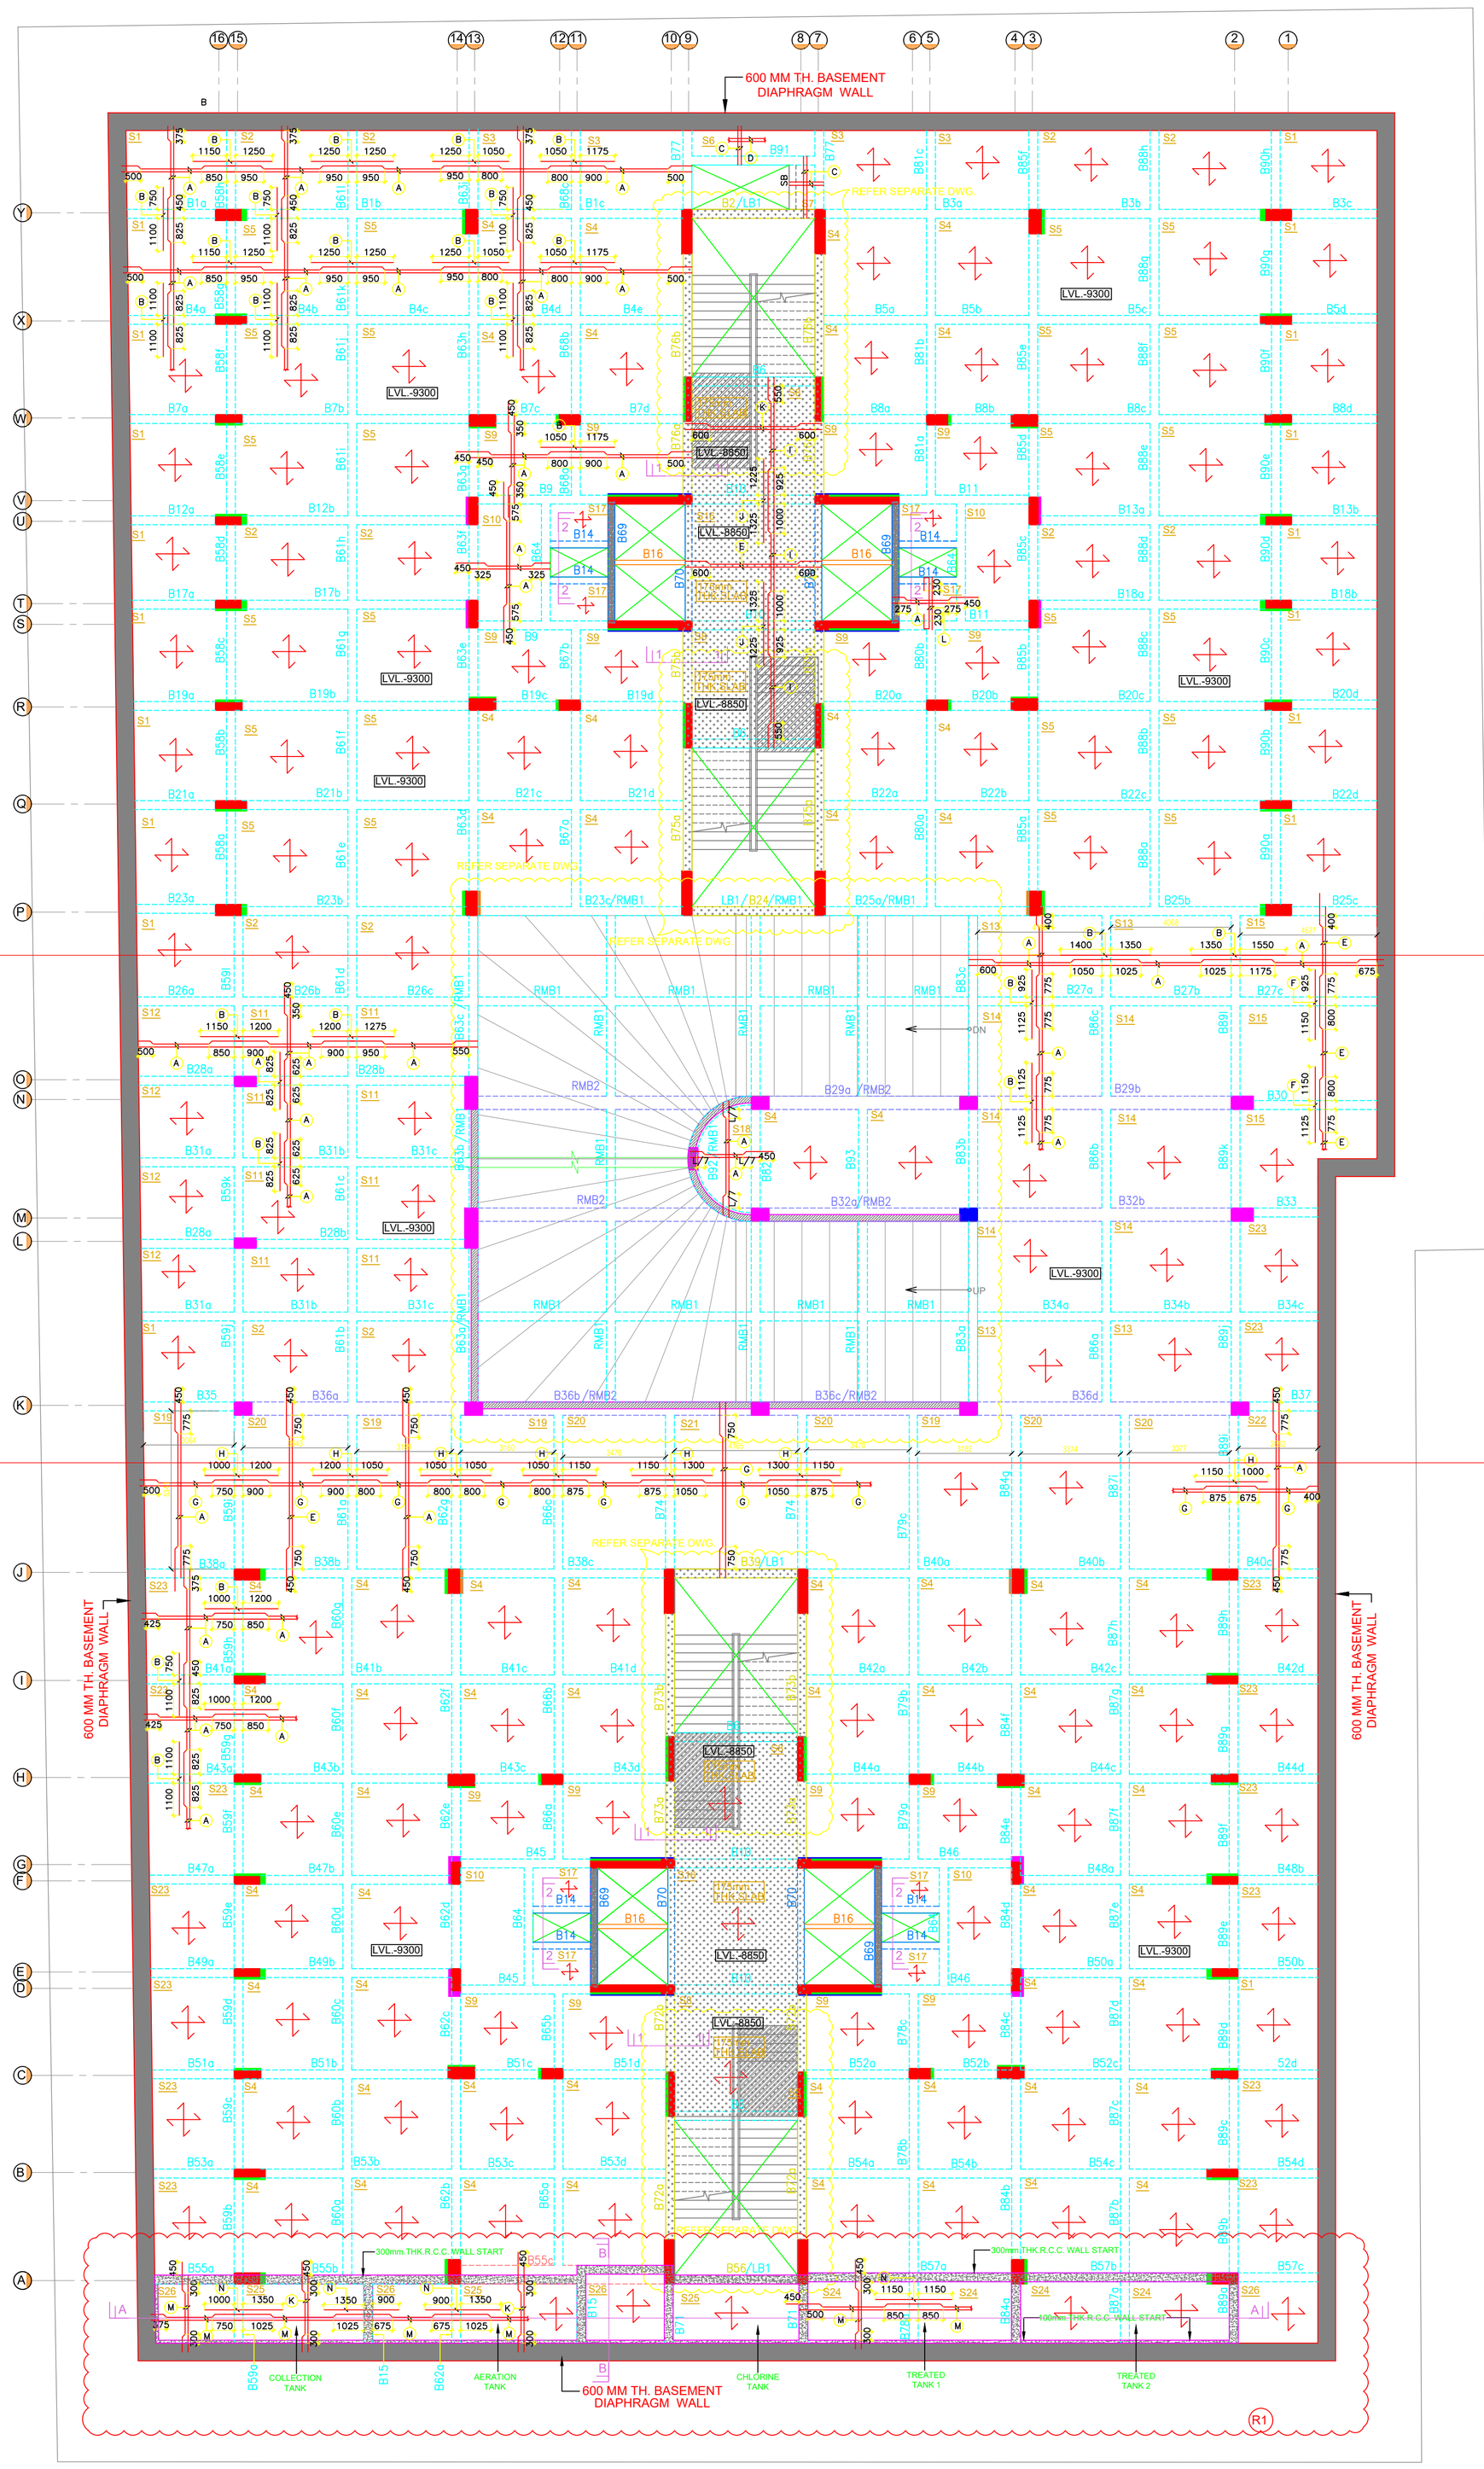

STRUCTURAL LAY-OUT AT 3rd. BASEMENT ROOF SLAB LEVEL

* ALL CENTERLINE DIMENSIONS AND LOCATIONS ARE AS PER ARCH. DRAWINGS.
* ALL SLABS ARE 150mm THK. UNLESS OTHERWISE SPECIFIED.
* ALL MASONRY WORKS SHALL BE OF LIGHT WEIGHT AAC BLOCK OF DENSITY 8KN/M³.
* ALL CUT OUTS & SLEEVES FOR PLUMBING, DRAINAGE & ELECTRIFICATION SHALL BE AS PER ARCHI/MEPF DETAILS. BUT IT HAS TO BE CONFIRMED BY US PRIOR TO EXECUTIONS.

* THUS MARKED INDICATES CUTOUT.
* THUS MARKED SLAB -9300 LVL.
* THUS MARKED SLAB -8850 LVL
* THUS MARKED R.C.C. WALL START (NON STR. R.C.C.WALL)
* THUS MARKED R.C.C. WALL END

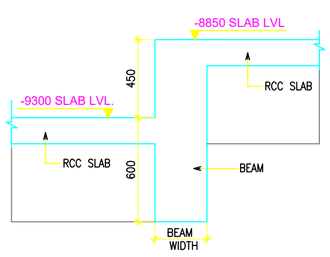

SECTION: 1-1
(SCALE:-1:25)

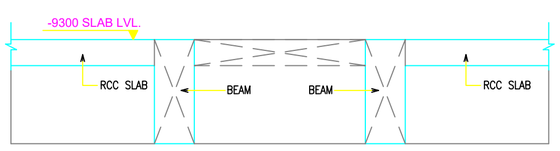

SECTION: 2-2
(SCALE:-1:25)

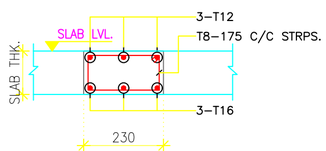

TYPICAL SB DETAIL

GENERAL NOTES :-

1. ALL DIMENSIONS ARE IN MILLIMETERS AND UNLESS OTHERWISE SPECIFIED.
2. FOR ALL NOTES, REFER OUR DRG NO: STD.01.
3. CEMENT SHALL BE OPC 43 GRADE OR HIGHER / AS PER TENDER SPECIFICATIONS.
4. SUPERVISION SHALL NOT BE OUR RESPONSIBILITY.
5. TO TAKE OUT THE CUBE AND MATERIAL TESTING SHALL BE CONTRACTOR/ BUILDER/CLIENTS RESPONSIBILITY.
6. LOAD TESTING OF STRUCTURE SHALL NOT BE OUR RESPONSIBILITY.
7. ALL DIMENSIONS ARE TO BE READ AND NOT TO BE MEASURED
8. 'T' INDICATE STEEL Fe 550D GRADE TMT BARS.
9. ALL CONC.MIX. M:30 UNLESS OTHERWISE SPECIFIED.
10. LD = DEVELOPMENT LENGTH : 50 X'T' ; WHERE 'T' = DIA. OF BAR.
11. ALL AAC BLOCK WORK SHALL BE WITH SPECIAL CHEMICAL MORTAR ONLY
12. STRUCTURAL LAY OUT SHOULD BE REFERRED ONLY FORSTRUCTURAL DETAILING.
13. PLEASE REFER ARCHITECTURAL DWG FOR LVLS. & SETTING OUT CENTERLINE DIMENSIONS. THE CENTRELINE PUT IN THIS STRUCTURAL FOUNDATION LAYOUT IS SIMPLY INDICATIVE OF LOCATION AND AS APPROVED BY ARCHITECT.
14. PLEASE REFER ARCH. DWG. FOR FINAL LAY OUT.
15. CONTRACTOR SHOULD INFORM ARCHITECT/STRUCTURAL CONSULTANT IN CASE OF ANY CHANGE IN EXISTING CONDITION FOUND, IMMEDIATELY.
16. THIS DRG. SHOULD BE READ ALONG WITH ARCHITECTURAL DRGS.AND ANY CHANGES/DEVIATION FOUND SHOULD BE IMMEDIATELY BROUGHT TO NOTICE OF ARCHITECT.
17. THIS DWG.SHOULD BE READ ALONG WITH RELEVANT DETAILS
18. MIX DESIGN SHOULD BE GOT APP. PRIOR TO EXECUTION OF WORK.
19. ALL STEEL (TOP/BOTTOM) OF DIFFERENT ZONE SHALL BE LAPPED IN ADDITION WHERE THE ZONE TERMINATES; BY LENGTH EQUAL TO THE DEVELOPMENT LENGTH OF HIGHER DIA BAR.
20. AS PER SITE CONDITION,WHEREVER RETENTION SYSTEM REQUIRE, CLIENT/DEVELOPER SHOULD BE TAKEN CARE OF IT & BROUGHT TO OUR NOTICE.
21. FOR MASONARY WORK,BLOCKS SHOULD BE WELL SUB-MERGED BEFORE STARTING THE MASONARY.
22. ENOUGH WATERING SHALL BE DONE TO THE BLOCK WORK/MASONARY BEFORE STARTING PLASTER WORK.

BEAM SCHEDULE

BEAM SIZE	BEAM NO.
150X600	B16
230X600	B14,B69,B70
300X600	B1,B3,B4,B5,B6,B7,B8,B9,B10,B11,B12,B13,B15,B17,B18,B19, B20,B21,B22,B23,B25,B26,B27,B28,B30,B31,B33,B34,B35,B37 B38,B40,B41,B42,B43,B44,B45,B46,B47,B48,B49,B50,B51, B52,B53,B54,B55ob,B57,B58,B59,B60,B61,B62,B63,B64,B65, B66,B67,B68,B71,B74,B77,B78,B79,B80,B81,B82,B83,B84, B85,B86,B87,B88,B89,B90,B91,B92,B93
300X1050	B2,B24,B39,B56,B72,B73,B75,B76
450X600	B29,B32,B36,
630X600	55c

SCHEDULE OF SLAB R/F

A	T8-200 c/c ALT. BENT UP AT BOTTOM
B	T8-400 c/c EXTRA AT TOP
C	T8-200 c/c STRAIGHT BARS AT BOTTOM
D	T8-200 c/c DISTRIBUTION STEEL
E	T8-150 c/c ALT. BENT UP AT BOTTOM
F	T8-300 c/c EXTRA AT TOP
G	T8-125 c/c ALT. BENT UP AT BOTTOM
H	T8-250 c/c EXTRA AT TOP
I	T12-125 c/c ALT. BENT UP AT BOTTOM
J	T12-250 c/c EXTRA AT TOP
K	T12-150 c/c ALT. BENT UP AT BOTTOM
L	T8-200 c/c ALT. CHIPIYA AT BOTTOM
M	T10-150 c/c ALT. BENT UP AT BOTTOM
N	T10-300 c/c EXTRA AT TOP
O	T10-200 c/c ALT. BENT UP AT BOTTOM

PRINTS ISSUED

Date	Rev.	Arch	Client	Site	Consl.	Contr.	Office	Total	REMARK

NO.	DATE	REVISION	BY	DR	CH
R1	18.09.23	ADDED STP DETAILS	D	B	C

ARCHITECT
VARSHA DESIGN CONSULTANT
B 508 & 509 Gopal Place Opp.ocean Park ,satellite Road, nehrunagar,ahmedabad
Ph. 74050 00843,92272 26644
E-mail: varshadesign@yahoo.com

JOB TITLE: RESI. APPT. FOR SANGHVI REALTY

DRAWING TITLE: STRUCTURAL LAYOUT AT 3rd BASEMENT ROOF SLAB LVL.

JOB NO	DATE	DRG. NO.	REVISION
3922	24-05-22	B3-S-101	R1

SCALE	SHEET SIZE	DRAWN	DESIGN	CHECKED
1:125	A1	RAVI BABUBHAI	DENISH	CHIRAG

STRUCTURAL CONSULTANT
DUCON
CONSULTANTS PRIVATE LIMITED
A3-A4, 3rd FLOOR, Safal profitaire, Corporate road, Nr prahladnagar Garden, S.G.ROAD, Ahm'd-51.
E-mail: contact@duconconsultants.in
PH:40073196,29705245,29705246