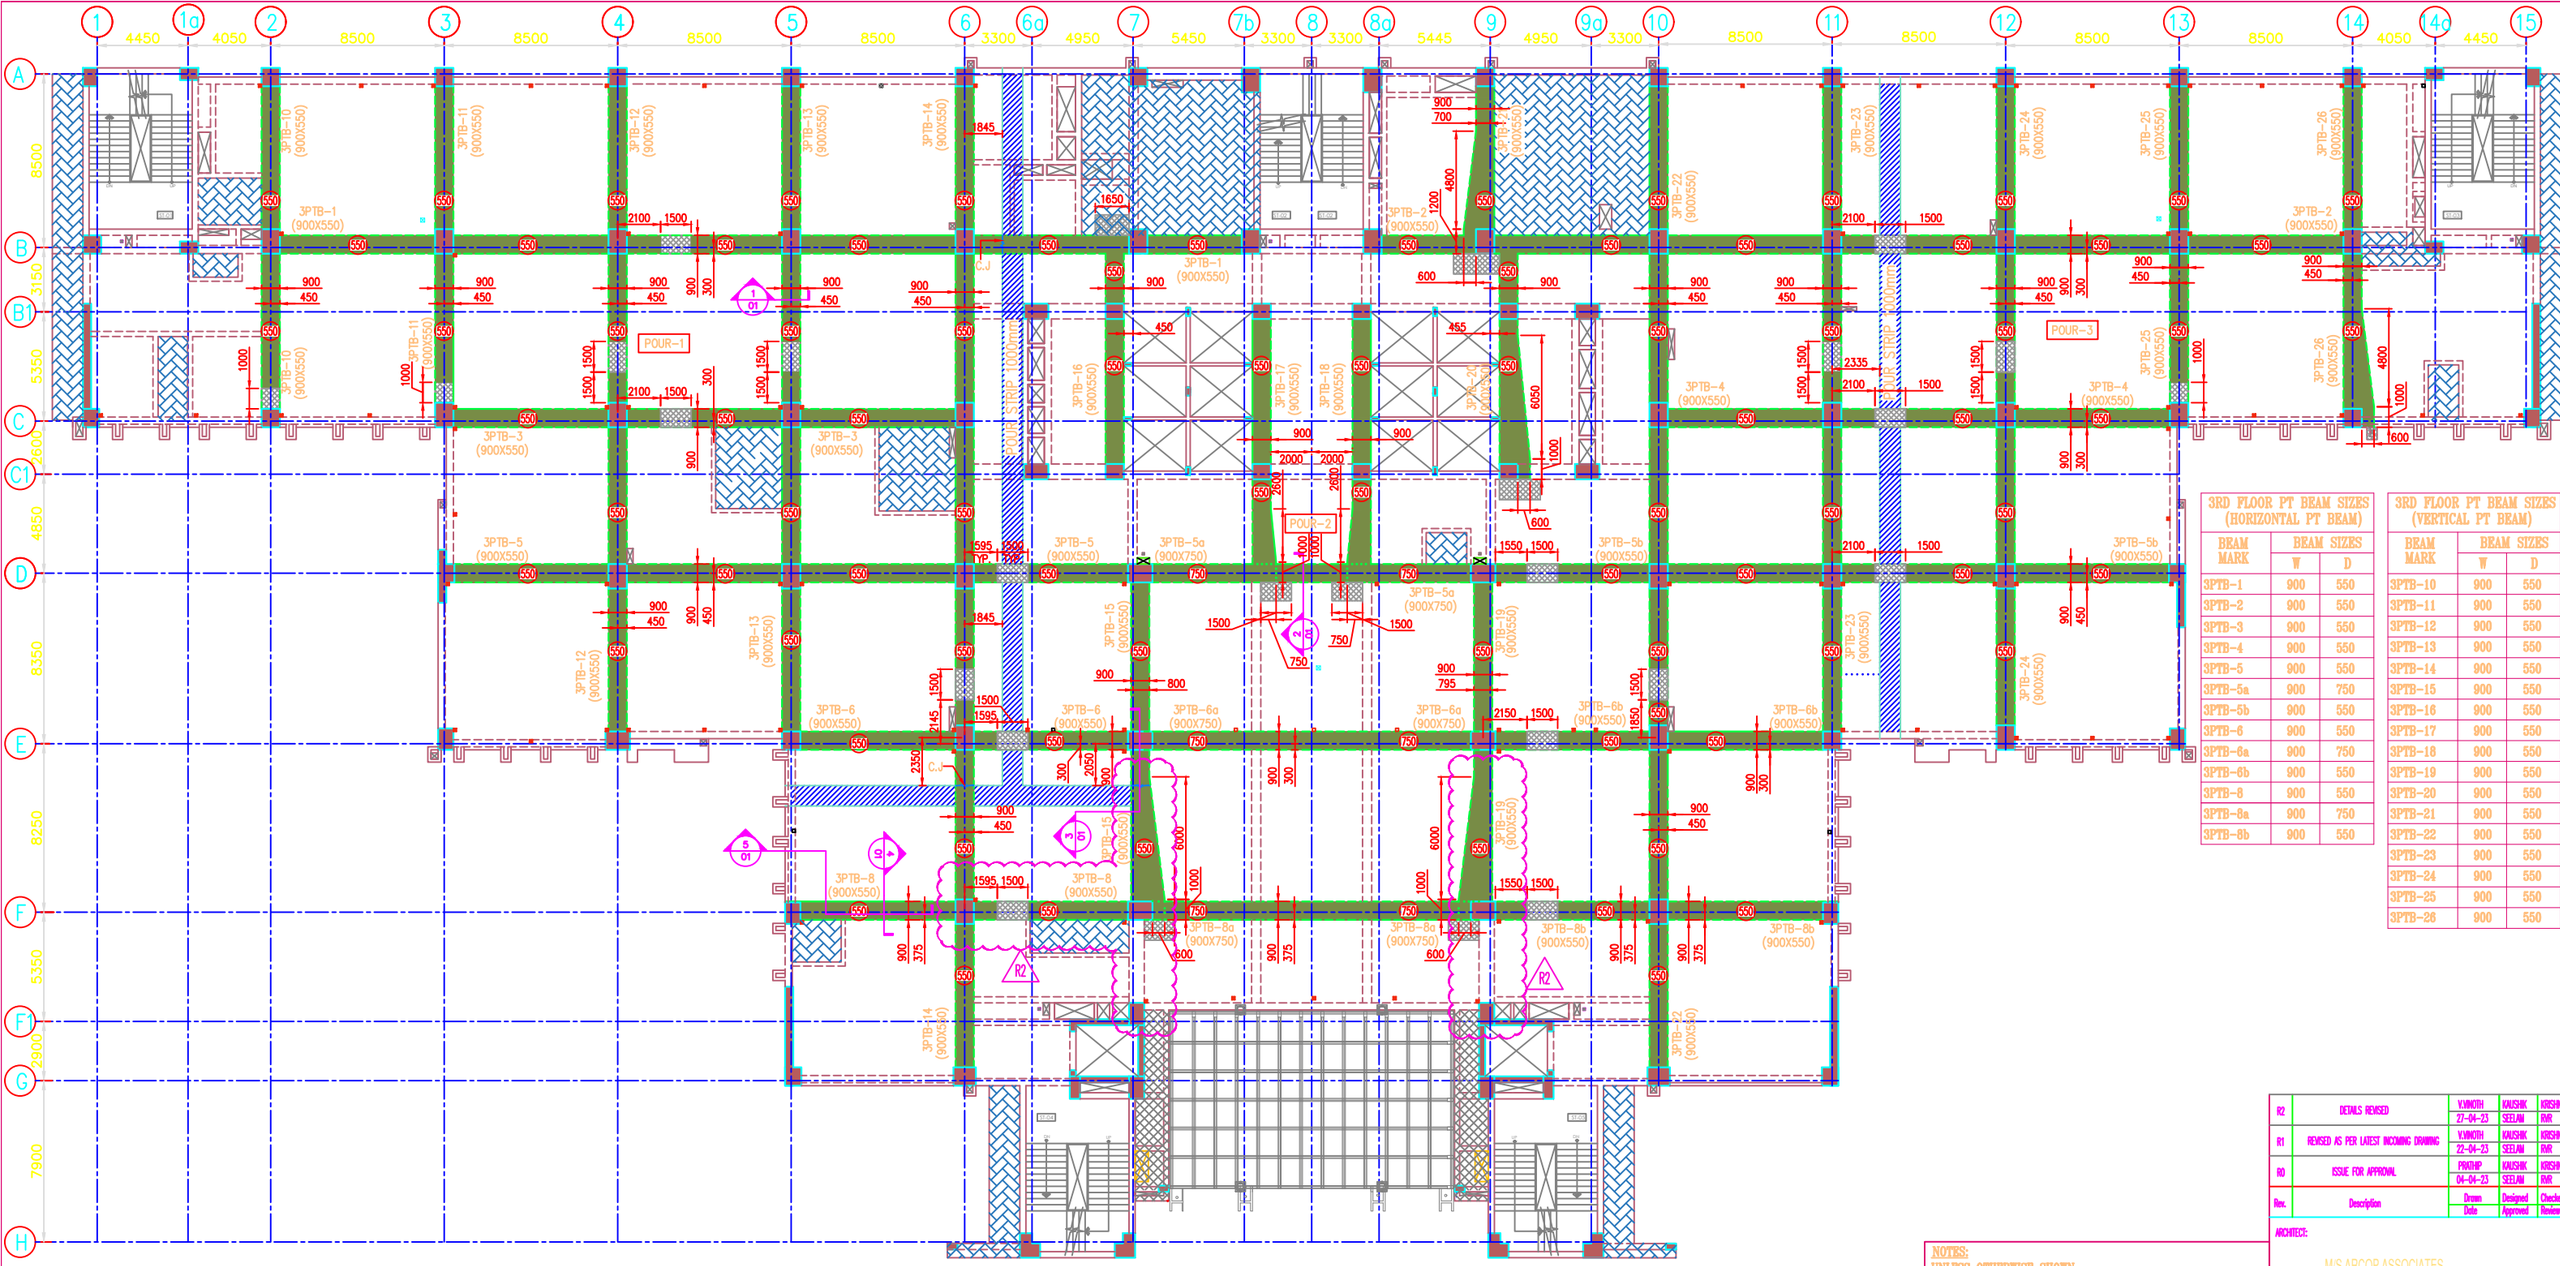

3RD FLOOR LAYOUT PLAN (POST-TENSIONED)
Scale = 1:150

3RD FLOOR PT BEAM SIZES (HORIZONTAL PT BEAM)		
BEAM MARK	BEAM SIZES	
	W	D
3PTB-1	900	550
3PTB-2	900	550
3PTB-3	900	550
3PTB-4	900	550
3PTB-5	900	550
3PTB-5a	900	750
3PTB-5b	900	550
3PTB-6	900	550
3PTB-6a	900	750
3PTB-6b	900	550
3PTB-8	900	550
3PTB-8a	900	750
3PTB-8b	900	550

3RD FLOOR PT BEAM SIZES (VERTICAL PT BEAM)		
BEAM MARK	BEAM SIZES	
	W	D
3PTB-10	900	550
3PTB-11	900	550
3PTB-12	900	550
3PTB-13	900	550
3PTB-14	900	550
3PTB-15	900	550
3PTB-16	900	550
3PTB-17	900	550
3PTB-18	900	550
3PTB-19	900	550
3PTB-20	900	550
3PTB-21	900	550
3PTB-22	900	550
3PTB-23	900	550
3PTB-24	900	550
3PTB-25	900	550
3PTB-26	900	550

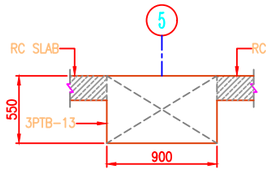

SECTION 1-1
Scale = 1:25



SECTION 2-2
Scale = 1:25

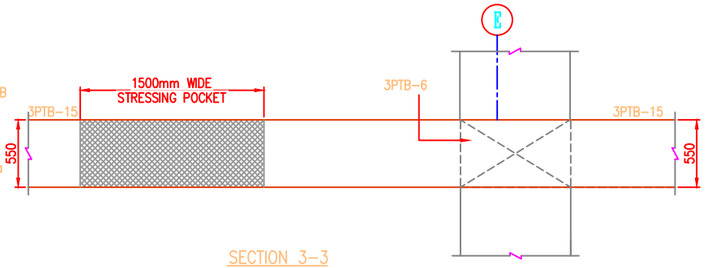

SECTION 3-3
Scale = 1:25

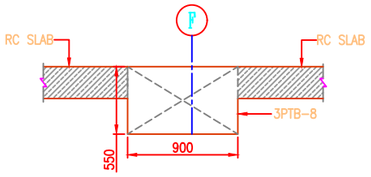

SECTION 4-4
Scale = 1:25

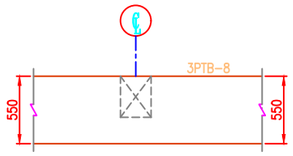

SECTION 5-5
Scale = 1:25

LEGENDS:
- 1000/1500mm STRESSING POCKET (THIS AREA HAS TO BE CONCRETED AFTER STRESSING.)
- COLUMN/SHEAR WALL/RC WALL CONTINUOUS
- NON-STRUCTURAL WALL/COLUMN
- PT BEAMS
- 75mm SUNK
- POUR STRIP 1000MM WIDE.
- CONSTRUCTION JOINT (C.J)

NOTES:
UNLESS OTHERWISE SHOWN,
1) ALL DIMENSIONS ARE IN MM
2) ALL POST TENSIONED BEAMS SIZES TO BE READ W x D.
3) IT HAS TO BE ENSURED THAT AT ANY CASE THE TOTAL CONSTRUCTION LOADS DOES NOT EXCEED THE SPECIFIED DESIGN LOADS.
4) ALL SLABS AND BEAMS ARE RC SLABS AND RC BEAMS UNLESS NOTED OTHERWISE. FOR RC SLAB & RC BEAM DETAILS REFER STRUCTURAL CONSULTANT DRAWINGS.
5) FOR COLUMN SIZES & LAYOUT REFER STRUCTURAL CONSULTANT DRAWING.
6) THIS DRAWING HAS TO BE READ IN CONJUNCTION WITH RELEVANT ARCHITECTURAL AND RELATED STRUCTURAL DRAWING.
7) SUFFICIENT SUPPORTS (IF REQUIRED) HAS TO BE MAINTAINED BELOW THIS FLOOR WHILE CONCRETING UPPER SLABS.
8) GRADE OF CONCRETE - M35
GRADE OF STEEL - Fe500
PT DESIGN CRITERIA - TYPE 3
9) ALL PT BEAMS ARE DESIGNED AS "T" BEAM
10) RC SLAB & PT BEAM SHOULD BE OF SAME GRADE (M35).
11) RC SLAB BENDING HAS TO BE ADDRESSED BY STRUCTURAL CONSULTANT.
12) LOADS ARE ARRIVED BASED ON THE E-TABS MODEL RECEIVED ON 24.02.2023 STRUCTURAL CONSULTANT AFFIRM THE LOADS REPRODUCED BY UTRACON.
13) COMMENTS ON STRUCTURAL DRAWING 2ND FLOOR RECEIVED ON 17.02.2023 IS USED TO PREPARE THIS PT LAYOUT PLAN.IF ANY DISCREPANCIES FOUND BY ANY PARTIES, HAS TO IMMEDIATELY REPORT TO THE PT DESIGNER.
14) REMOVED PT BEAM NUMBERS : PTB-7 & PTB-9

Rev.	Description	Drawn / Date	Designed / Approved	Checked / Reviewed
R2	DETAILS REVISED	V.MNOTH 27-04-23	KAUSHIK SEELAM	KRISHNA RVR
R1	REVISED AS PER LATEST INCOMING DRAWING	V.MNOTH 22-04-23	KAUSHIK SEELAM	KRISHNA RVR
R0	ISSUE FOR APPROVAL	PRATHIP 04-04-23	KAUSHIK SEELAM	KRISHNA RVR

ARCHITECT:
M/S.ARCOP ASSOCIATES

CLIENT:
M/S.GLOBAL HEALTH CITY PVT LTD

CONSULTANT:
TPC TECHNICAL PROJECTS CONSULTANTS(P)LTD.
H.O- B-74, SECTOR 57, NODA
UTTAR PRADESH-201301(INDIA)
BOARD NO.-91-120-4306600

PT SPECIALIST:
UTRACON STRUCTURAL SYSTEMS PVT LTD
No.45, 5th Street,Padmanaba Nagar, Adyar,
Chennai-600 020, INDIA
Tel:+91 (44) 24468001/2/3 Fax:+91 (44) 2446 8004
E-Mail: utraconindia@utracon.com
Website: www.utraconindia.com

PROJECT TITLE:
PROPOSED BUILDING FOR MEDANTA HOSPITAL AT NOIDA,UP.

DRAWING TITLE:
POST-TENSIONED
3RD FLOOR LAYOUT PLAN

DRAWN:	DESIGNED:	CHECKED:	REVIEWED:
PRATHIP	KAUSHIK	KRISHNA	RVR
SCALE: 1:150	DATE: 04-04-23	E-MAIL: unsidesign1@utraconindia.com	APPROVED: SEELAM

DRAWING NO: 220517/SD/3-01
REVISION: R2

/engdep/sdsft/2022/220517-proposed building for medanta hospital at noida/pdsgdwg/2nd floor

THIS DRAWING IS COPYRIGHT AND REMAINS THE PROPERTY OF UTRACON STRUCTURAL SYSTEMS PVT LTD AND MUST NOT BE USED/RETAINED OR COPIED WITHOUT WRITTEN PERMISSION.

ORIGINAL SIZE OF THIS DRAWING IS A1