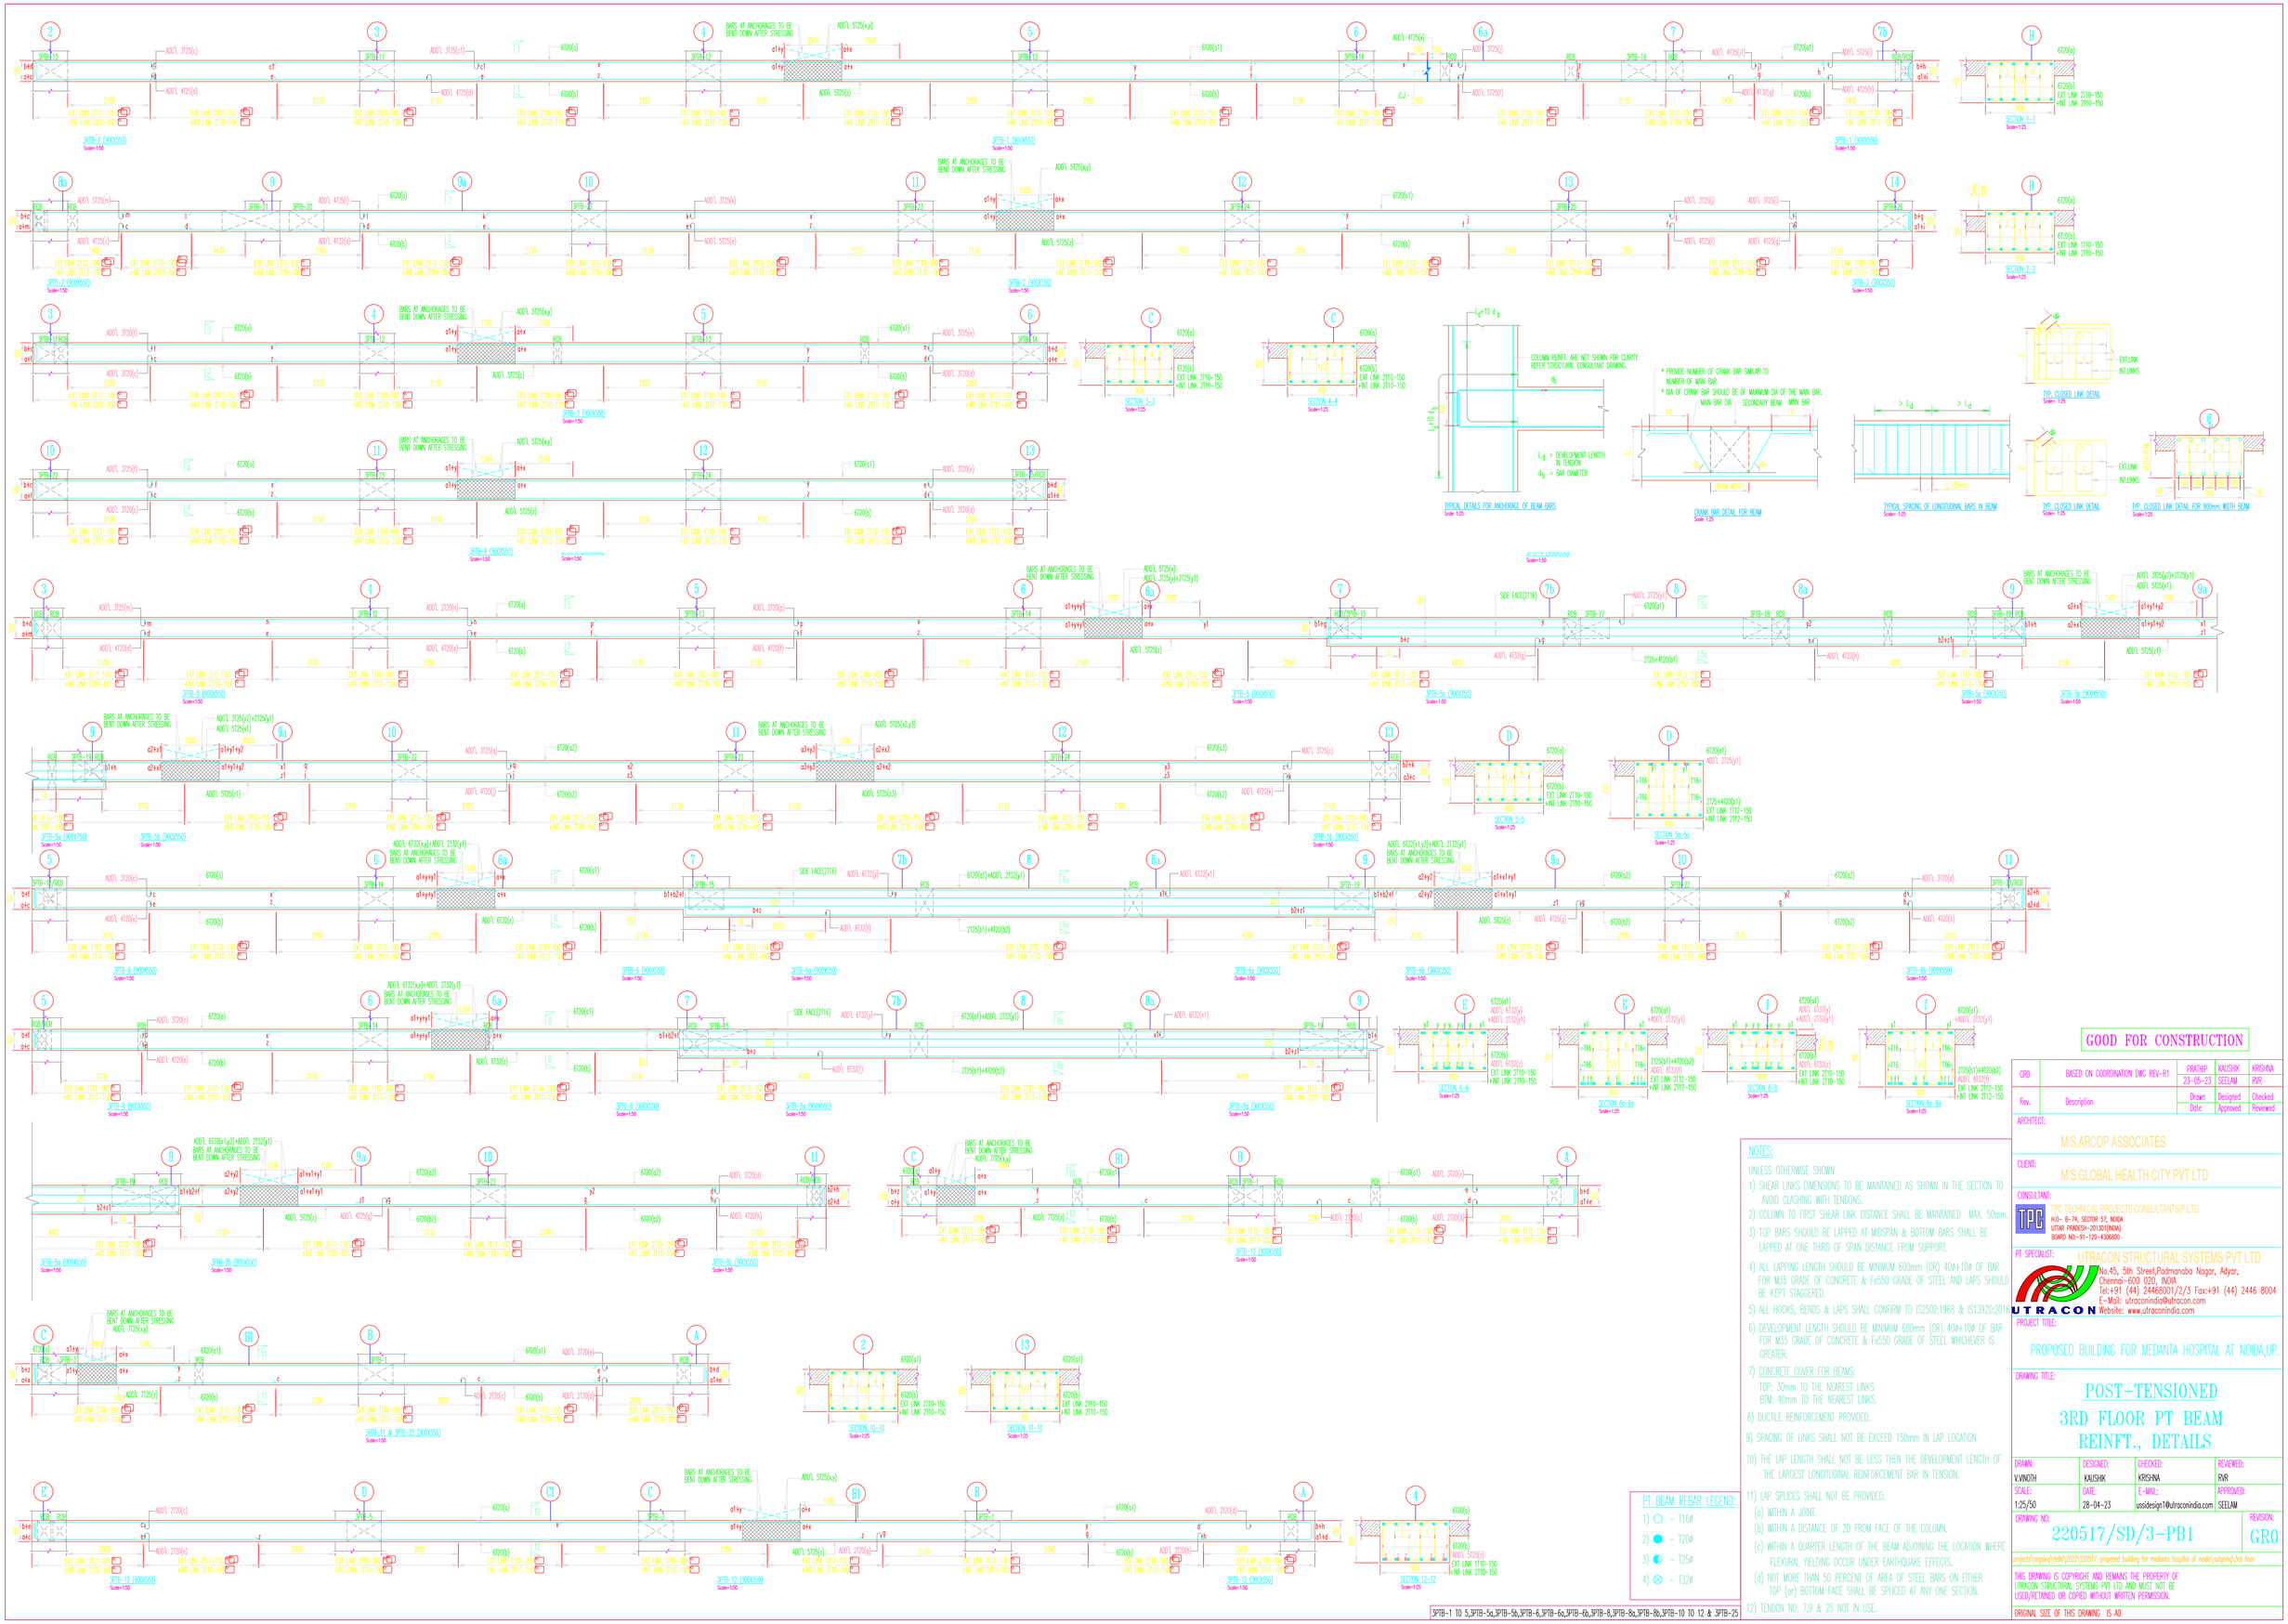

NOTES:

UNLESS OTHERWISE SHOWN

1) SHEAR LINKS DIMENSIONS TO BE MAINTAINED AS SHOWN IN THE SECTION TO AVOID CLASHING WITH TENDONS.
2) COLUMN TO FIRST SHEAR LINK DISTANCE SHALL BE MAINTAINED MAX. 50mm.
3) TOP BARS SHOULD BE LAPPED AT MIDSPAN & BOTTOM BARS SHALL BE LAPPED AT ONE THIRD OF SPAN DISTANCE FROM SUPPORT.
4) ALL LAPPING LENGTH SHOULD BE MINIMUM 600mm (OR) 40ϕ+10ϕ OF BAR FOR M35 GRADE OF CONCRETE & Fe550 GRADE OF STEEL AND LAPS SHOULD BE KEPT STAGGERED.
5) ALL HOOKS, BENDS & LAPS SHALL CONFIRM TO IS2502:1968 & IS13920:2016
6) DEVELOPMENT LENGTH SHOULD BE MINIMUM 600mm (OR) 40ϕ+10ϕ OF BAR FOR M35 GRADE OF CONCRETE & Fe550 GRADE OF STEEL WHICHEVER IS GREATER.
7) CONCRETE COVER FOR BEAMS:
   TOP: 30mm TO THE NEAREST LINKS
   BTM: 40mm TO THE NEAREST LINKS.
8) DUCTILE REINFORCEMENT PROVIDED.
9) SPACING OF LINKS SHALL NOT BE EXCEED 150mm IN LAP LOCATION
10) THE LAP LENGTH SHALL NOT BE LESS THEN THE DEVELOPMENT LENGTH OF THE LARGEST LONGITUDINAL REINFORCEMENT BAR IN TENSION.
11) LAP SPLICES SHALL NOT BE PROVIDED:
   (a) WITHIN A JOINT.
   (b) WITHIN A DISTANCE OF 2D FROM FACE OF THE COLUMN.
   (c) WITHIN A QUARTER LENGTH OF THE BEAM ADJOINING THE LOCATION WHERE FLEXURAL YIELDING OCCUR UNDER EARTHQUAKE EFFECTS.
   (d) NOT MORE THAN 50 PERCENT OF AREA OF STEEL BARS ON EITHER TOP (or) BOTTOM FACE SHALL BE SPLICED AT ANY ONE SECTION.
12) TENDON NO: 7,9 & 25 NOT IN USE.

PT BEAM REBAR LEGEND:

1) ○ - T16ϕ
2) ● - T20ϕ
3) ◐ - T25ϕ
4) ⊗ - T32ϕ

3PTB-1 TO 5,3PTB-5a,3PTB-5b,3PTB-6,3PTB-6a,3PTB-6b,3PTB-8,3PTB-8a,3PTB-8b,3PTB-10 TO 12 & 3PTB-25

GOOD FOR CONSTRUCTION

Rev.	Description	Drawn / Date	Designed / Approved	Checked / Reviewed
GR0	BASED ON COORDINATION DWG REV-R1	PRATHIP 23-05-23	KAUSHIK SEELAM	KRISHNA RVR

ARCHITECT:
M/S.ARCOP ASSOCIATES

CLIENT:
M/S.GLOBAL HEALTH CITY PVT LTD

CONSULTANT:
TPC TECHNICAL PROJECTS CONSULTANTS(P)LTD.
NLO- B-74, SECTOR 57, NOIDA
UTTAR PRADESH-201301(INDIA)
BOARD NO:-91-120-4306800

PT SPECIALIST:
UTRACON STRUCTURAL SYSTEMS PVT LTD
No.45, 5th Street,Padmanaba Nagar, Adyar,
Chennai-600 020, INDIA
Tel:+91 (44) 24468001/2/3 Fax:+91 (44) 2446 8004
E-Mail: utraconindia@utracon.com
Website: www.utraconindia.com

PROJECT TITLE:
PROPOSED BUILDING FOR MEDANTA HOSPITAL AT NOIDA,UP.

DRAWING TITLE:
POST-TENSIONED 3RD FLOOR PT BEAM REINFT., DETAILS

DRAWN:	DESIGNED:	CHECKED:	REVIEWED:
N.VINOTH	KAUSHIK	KRISHNA	RVR
SCALE: 1:25/50	DATE: 28-04-23	E-MAIL: ussdesign1@utraconindia.com	APPROVED: SEELAM

DRAWING NO: 220517/SD/3-PB1

REVISION: GR0

projects\ongoing\delhi\2022\220517-proposed building for medanta hospital at noida\outgoing\3rd floor

THIS DRAWING IS COPYRIGHT AND REMAINS THE PROPERTY OF UTRACON STRUCTURAL SYSTEMS PVT LTD AND MUST NOT BE USED,RETAINED OR COPIED WITHOUT WRITTEN PERMISSION.

ORIGINAL SIZE OF THIS DRAWING IS A0