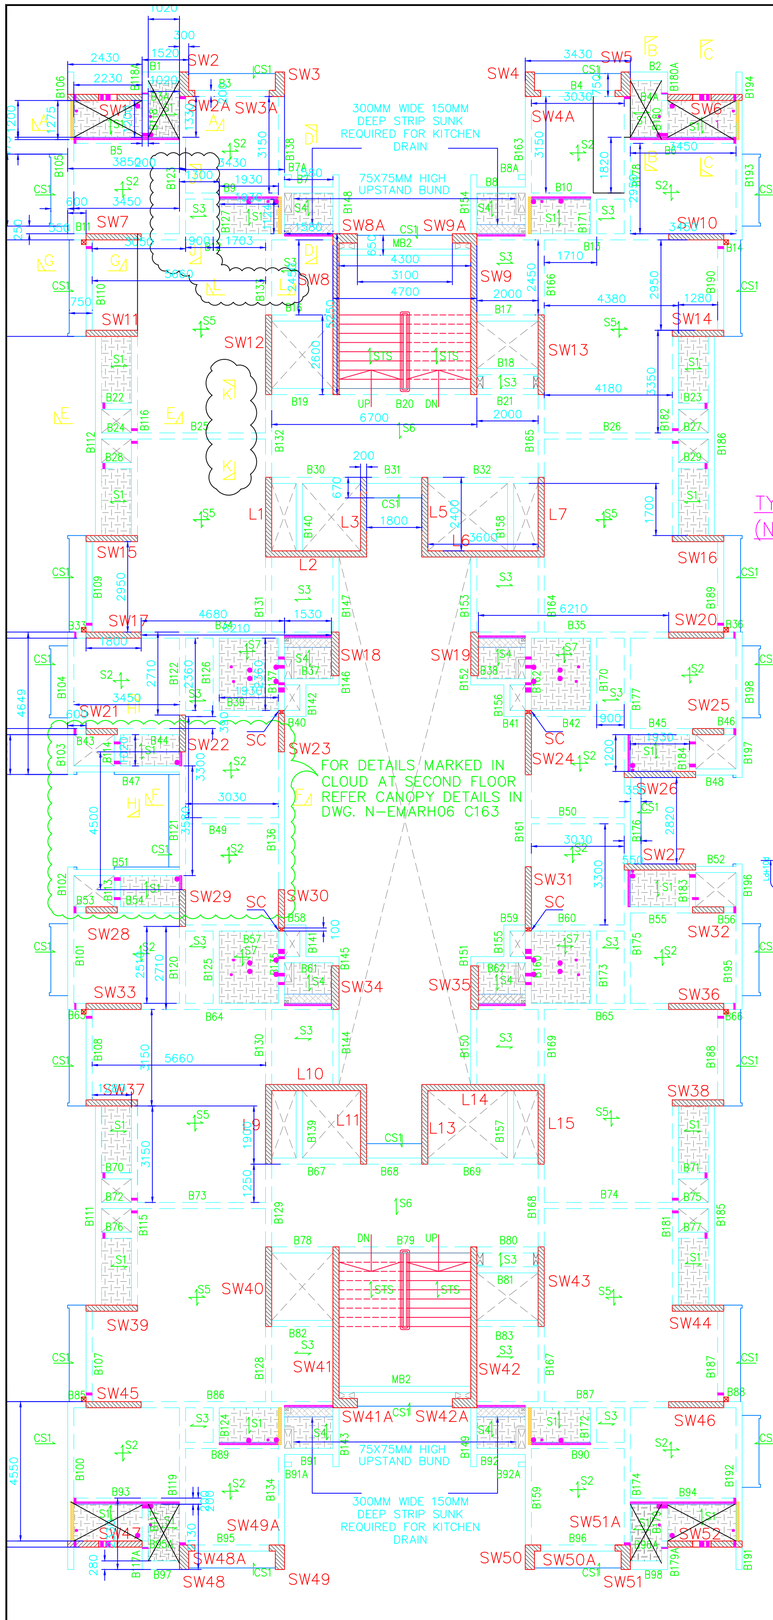

LAYOUT AT SECOND TO FOURTEENTH FLOOR LEVEL

SCHEDULE OF SLABS

SLAB MKD.	THICKNESS	TYPE	REINFORCEMENT SHORT BARS	REINFORCEMENT LONG BARS	REMARKS
S1	125	ONE WAY	Y8@150c/c (ALT. BENT UP)	Y8@250c/c (ALL STRAIGHT)	SUNK BY 60
S2	125	TWO WAY	Y8@200c/c (ALT. BENT UP)	Y8@200c/c (ALT. BENT UP)	-----
S3	125	ONE WAY	Y8@200c/c (ALT. BENT UP)	Y8@250c/c (ALL STRAIGHT)	-----
S4	125	ONE WAY	Y8@100c/c (TOP & BOT.)	Y8@200c/c (ALL STRAIGHT)	SUNK BY 60
S5	175	TWO WAY	Y10@125c/c (ALT. BENT UP)	Y10@125c/c (ALT. BENT UP)	-----
S6	125	ONE WAY	Y8@125c/c (ALT. BENT UP)	Y8@250c/c (ALL STRAIGHT)	-----
S7	125	TWO WAY	Y8@200c/c (ALT. BENT UP)	Y8@200c/c (ALT. BENT UP)	SUNK BY 60
STS	150	ONE WAY	Y8@200c/c (ALL STRAIGHT)	Y12@100c/c (SCISSOR CROSS)	STAIRCASE WAIST SLAB
CS1	125	ONE WAY	Y8@100c/c (ALL BENT BACK)	Y8@200c/c (ALL STRAIGHT)	CANTILEVERED

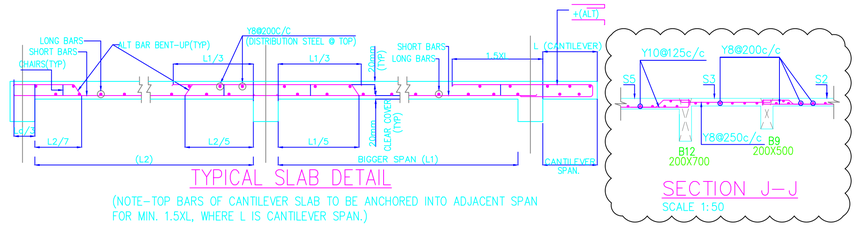

TYPICAL SLAB DETAIL

(NOTE-TOP BARS OF CANTILEVER SLAB TO BE ANCHORED INTO ADJACENT SPAN FOR MIN. 1.5XL, WHERE L IS CANTILEVER SPAN.)

SECTION J-J

SCALE 1:50

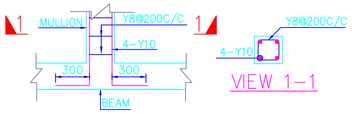

TYPICAL SECTION OF MULLION (NEAR DOOR)

VIEW 1-1



TYPICAL SECTION OF MULLION (NEAR LIFT)



VIEW 2-2



TYPICAL DETAILS OF UPSTAND BUND (FROM SLAB)

(FOR LOCATION OF BUND REFER ARCH. DWG.)

SCALE 1:25



TYPICAL DETAILS OF UPSTAND BUND (FROM BEAM)

(FOR LOCATION OF BUND REFER ARCH. DWG.)

SCALE 1:25

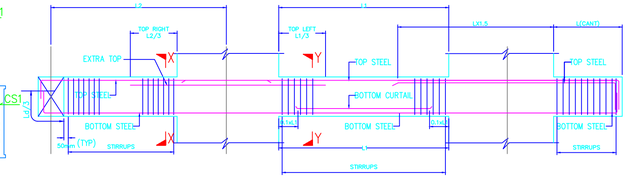

TYPICAL BEAM DETAIL (FOR NON-FRAMING BEAMS)

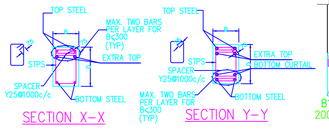

SECTION X-X

SECTION Y-Y

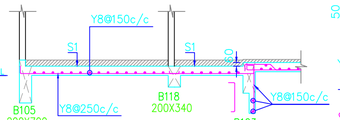

SECTION A-A

SCALE 1:50



SECTION G-G

SCALE 1:50

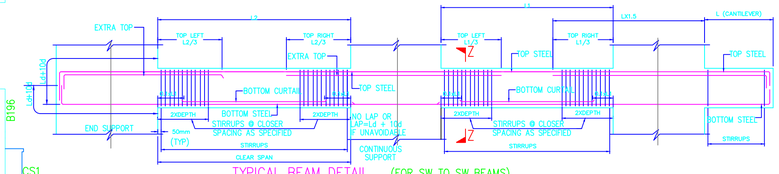

TYPICAL BEAM DETAIL (FOR SW TO SW BEAMS)

FRAMING BEAMS-SINGLE OR MULTI SPAN BEAMS WITH ALL SUPPORTS ON COLUMNS

(NOTE- TOP BARS OF CANTILEVER BEAMS TO BE ANCHORED INTO ADJACENT SPAN FOR MIN. 1.5XL, WHERE L IS CANTILEVER SPAN.)



SECTION Z-Z



SECTION B-B

SCALE 1:50



SECTION D-D

SCALE 1:50

NOTE :FOR SLEEVES DETAILS PLEASE REFER ARCH DWG. NO. N EMARH06 Y105 - TYPICAL FLOOR MEPF CUTOUT LAYOUT

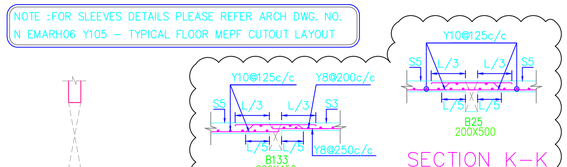

SECTION L-L

SCALE 1:50

SECTION K-K

SCALE 1:50

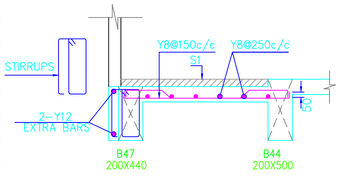

SECTION H-H

SCALE 1:25



SECTION E-E

SCALE 1:50

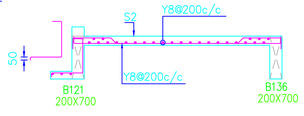

SECTION F-F

SCALE 1:50

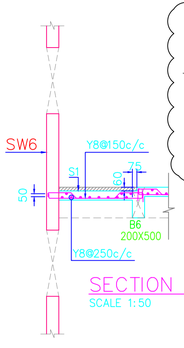

SECTION C-C

SCALE 1:50

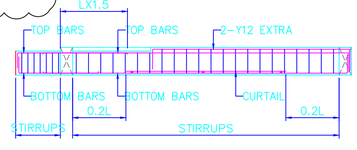

TYPICAL DETAILS OF NOTCH BEAM

SCALE 1:50

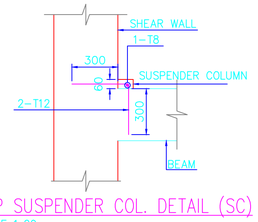

TYP SUSPENDER COL. DETAIL (SC)

SCALE 1:20

LEGENDS :-

- SLEEVES
- 60MM SLAB SUNK
- 150MM STRIP SUNK
- NOTCH IN BEAMS (75X60MM)
- NOTCH IN BEAMS (100X60MM)

DRAWING INTENTION :EXECUTION

GRADE OF CONCRETE M:30
GRADE OF REINFORCEMENT STEEL Fe 500

LEGEND

U.N.O..... UNLESS NOTED OTHERWISE
F.F.L..... FINISHED FLOOR LEVEL
F.G.L..... FINISHED GROUND LEVEL
E.G.L..... EXISTING GROUND LEVEL
TYP..... TYPICAL
T.O.C..... TOP OF CONCRETE
B.O.B..... BOTTOM OF BEAM
B/W..... BOTH WAYS
℄..... CENTRE LINE
C/C..... CENTRE TO CENTER SPACING
S.F.C..... SIDE FACE REINFORCEMENT
INV..... INVERTED BEAM
R/S..... REGULAR W.R.T. SUNK
L.D..... DEVELOPMENT LENGTH
R/F..... REINFORCEMENT STEEL

GENERAL NOTES

1. ALL DIMENSIONS ARE IN mm AND LEVELS IN METER. (U.N.O.)
2. THIS DRAWING IS TO BE READ IN CONJUNCTION WITH THE RELEVANT ARCHITECTURAL DRAWINGS, SERVICE CONSULTANTS DRGS. AND CIVIL CONTRACT DOCUMENT.
3. DO NOT SCALE THE DRAWING.
4. ANOMALIES IF ANY SHALL BE RESOLVED WITH M/S. EPICONS PRIOR TO EXECUTION OF WORK.
5. FOLLOW LATEST REVISION OF ALL RELEVENT DRAWINGS AND B.I.S. CODES.
6. 'HOLD' MARK MEANS WORK SHALL NOT BE EXECUTED
7. ONLY 'VALID FOR CONSTRUCTION' DRG. SHALL BE USED FOR EXECUTION OF WORK.
8. CONTACTOR SHALL CHECK ALL DIMENSIONS AND LEVELS BEFOR EXECUTION OF WORK.
9. ALL THE R.C.C./STRUCTURAL WORK SHALL BE EXECUTED STRICTLY UNDER COMPETENT TECHNICAL SUPERVISION SEPARATELY PROVIDED BY THE OWNER

CLEAR COVER TO REINFORCEMENT SHALL BE AS FOLLOWS. (U.N.O.)

1. FOOTINGS/RAFT :	BOTTOM & TOP = 50mm.	SIDE = 75mm.
2. COLUMNS :	BELOW GR. =65mm.(min)	ABOVE GR. = 40mm.
3. PLINTH BEAMS	ALL SIDES = 30MM.	
4. FLOOR BEAMS	BOTTOM = 30mm.	SIDE =30mm.
	TOP = 30mm.	
5. FLOOR SLABS	BOTTOM = 30mm.	TOP =30mm.
6. R.C.C. WALLS	BELOW GR.= 50mm.	ABOVE GR. = 50mm.
7. WATER TANK	WALL SIDE = 40mm.	SLAB = 40mm.
8. STAIRCASE WAIST SLAB	BOTTOM = 35mm.	TOP = 35mm.

LAP LENGTH FOR REINF. BARS (d = DIA OF BAR)

GRADE OF CONCRETE	FOR Fe-415 STEEL	FOR Fe-500 STEEL	FOR Fe-550 D STEEL
M :20	50 d	60 d	65 d
M :25	45 d	55 d	60 d
M :30	40 d	46 d	55 d
M :35	35 d	45 d	50 d
M :40 AND ABOVE	35 d	40 d	45 d

STEP:
PROVIDE SIDE FACE REINFORCEMENT FOR BEAMS WITH DEPTH MORE THAN 750mm.

TECHNICAL SPECIFICATIONS

1. CONTRACTOR SHALL COMPLY WITH ALL THE REQUIREMENTS OF
   IS : 456 (SECTION 1 AND 2) FOR R.C.C. AND P.C.C. WORKS
   IS : 800 FOR STRUCTURAL STEEL WORK
   IS : 1343 FOR PRE-STRESSED CONCRETE WORK
   IS : 4926 FOR READY MIXED CONCRETE.
2. CEMENT SHALL CONFIRM TO OPC - IS : 8112 /IS 12269, PPC- IS:1489, PSC- IS:455, SRC- IS : 12330
3. FLY-ASH SHALL CONFIRM TO IS : 3812.
4. GGBS SHALL CONFIRM TO IS 12089.
5. STRUCTURAL STEEL SHALL CONFIRM TO IS 2062 (GRADE-A)
6. CHEMICAL ADMIXTURES SHALL CONFIRM TO IS : 9103
7. Y INDICATES HIGH STRENGTH DEFORMED STEEL REINFORCEMENT BARS CONFORMING TO IS : 1786.
8. HT STRANDS FOR POST TENSIONING WORK SHALL COMPLY WITH IS : 14268.
9. THE CONSTRUCTION MATERIAL SHALL BE STRICTLY TESTED AS PER RELEVANT B.I.S. CODES BEFORE USE.
10. GRADE OF CONCRETE FOR R.C.C. SHALL BE AS SPECIFIED BY US WITH MINIMUM/MAXIMUN CEMENT CONTENTS AND W/B RATIO AS PER IS 456 : 2000.
11. ENVIRONMENTAL EXPOSURE CONDITION- MODERATE

NOTES FOR SUPER STRUCTURE

1. SUPERIMPOSED LOAD ON FLOOR SLABS SHALL NOT EXCEED 1.0 KN/SQ.M. (UDL).
2. CONSTRUCTION JOINT IN THE FLOOR SHALL BE LOCATED AT L/3 OF SPANS FOR SLAB AND BEAMS WITH OUR PRIOR PERMISSION. NO CONSTRUCTION JOINT IS PERMISSIBLE FOR CANTILEVER OR LARGE SPAN SLAB/BEAM.
3. CONTRACTOR SHALL BE SOLELY RESPONSIBLE FOR DESIGN AND SATISFACTORY PERFORMANCE OF THE FORMWORK.
4. FORMWORK SHALL BE PROVIDED WITH PROPER CAMBER AT APPROPRIATE LOCATION
5. FORMWORK REMOVAL SHALL CONFIRM TO PROVISIONS OF IS 456 :2000, SUBJECT TO ACHIVEMENT OF MINIMUM COMPRESSIVE STRENTH OF CONCRETE 0.7 Fck AT 7 DAYS AND 0.8 Fck AT 14 DAYS.
6. BACK PROPPING IF NESESSORY SHALL BE PROVIDED TO FLOOR SLABS AND BEAMS INCASE OF SPECIAL CONSTRUCTION REQUIREMENTS.

KEY PLAN

Shantigram
THE GOOD LIFE

NOTES:

1. ALL DIMENSIONS ARE IN MILLIMETERS AND LVLS IN METERS UNLESS OTHERWISE SPECIFIED
2. PLEASE DO NOT SCALE THE DRAWING.
3. FOLLOW WRITTEN DIMENSION.
4. ALL DIMENSIONS ARE UNFINISHED DIMENSIONS UNLESS OTHERWISE MENTIONED.
5. DISCREPENCIES SHOULD BE BROUGHT TO THE NOTICE OF ARCHITECT / CONSULTANT.
6. THIS DRAWING IS THE PROPERTY OF ATRECO AND IS NOT TO BE REPRODUCED, COPIED, HANDED OVER TO A THIRD PARTY OR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT HAS BEEN LOANED.

LEGEND :

REVISIONS

Nos.	Revision Description	Date	Revised By
R00	FOR EXECUTION	08.07.21	S.D.K.
R01	AS PER COMMENTS	22.06.21	S.D.K.
R02	AS PER COMMENTS	03.09.21	S.D.K.
R03	REV. AS PER COMMENTS	30.09.21	S.D.K.
R04	REV. AS PER COMMENTS	19.10.21	S.D.K.
R05	REV. AS PER COMMENTS	16.11.21	S.D.K.

PROJECT:

R-22 PROJECT AT SHANTIGRAM

CLIENT:

adani
Adani Estate Management Private Limited
ATRECO House, CBD, SHANTIGRAM NR. VASHINODEVI CIRCLE, S.G.HIGHWAY AHMEDABAD - 382421 GUJARAT, INDIA

ARCHITECT:

GA design
208 ADHYARU INDUSTRIAL ESTATE, SUNMILL COMPOUND, LOWER PAREL MUMBAI 400013.
TEL: 24980527, 65049256.
email: projects@gadesign.in

MEPF CONSULTANTS:

MEPTech
Building Services...Building Confidence...
MEPTECH CONSULTANTS
Address : 904,Supath Building,opp Mc Donald's, 132' Ring Road,Vijay cross Road,Navrangpura, Ahmedabad-380009
Email : info@meptech.in
Web : www.meptech.in
Contact : 079-48011496

LANDSCAPE CONSULTANT:

NEWARCH LANDSCAPES LLP
NEWARCH® LANDSCAPES LLP | +91 22 2833 7173 | +91 22 2898 2904 | 8369102789
202-203, Gokarna, R. M. Bhattad Road, Borivali (W), Mumbai - 400092, INDIA.

EPICONS CONSULTANTS PVT. LTD
ARCHITECTURE AND DETAIL ENGINEERING DIVISION
216 A,Amargain Complex, LBS road, khopat, Thane 400 601
ph 91 22 25471144, 25472356, 25475434 www.epicons.co.in

	Name	Sign
Drawn By	R.A.N	
Checked by	S.D.K	
Approved By	A.S.P	

DWG_NO:
N-EMARH06 C149 R05

DWG_TITLE:
LAYOUT AT SECOND TO FOURTEENTH FLOOR LEVEL

DATE: 16.11.2021

SCALE: 1:100

0 100 200 500 M

N

CAD File No: