STRUCTURAL LAYOUT AT (-03.200) LVL.

ALL SLABS ARE 250 THICK. EXCEPT WHERE STATED
SCALE 1:100

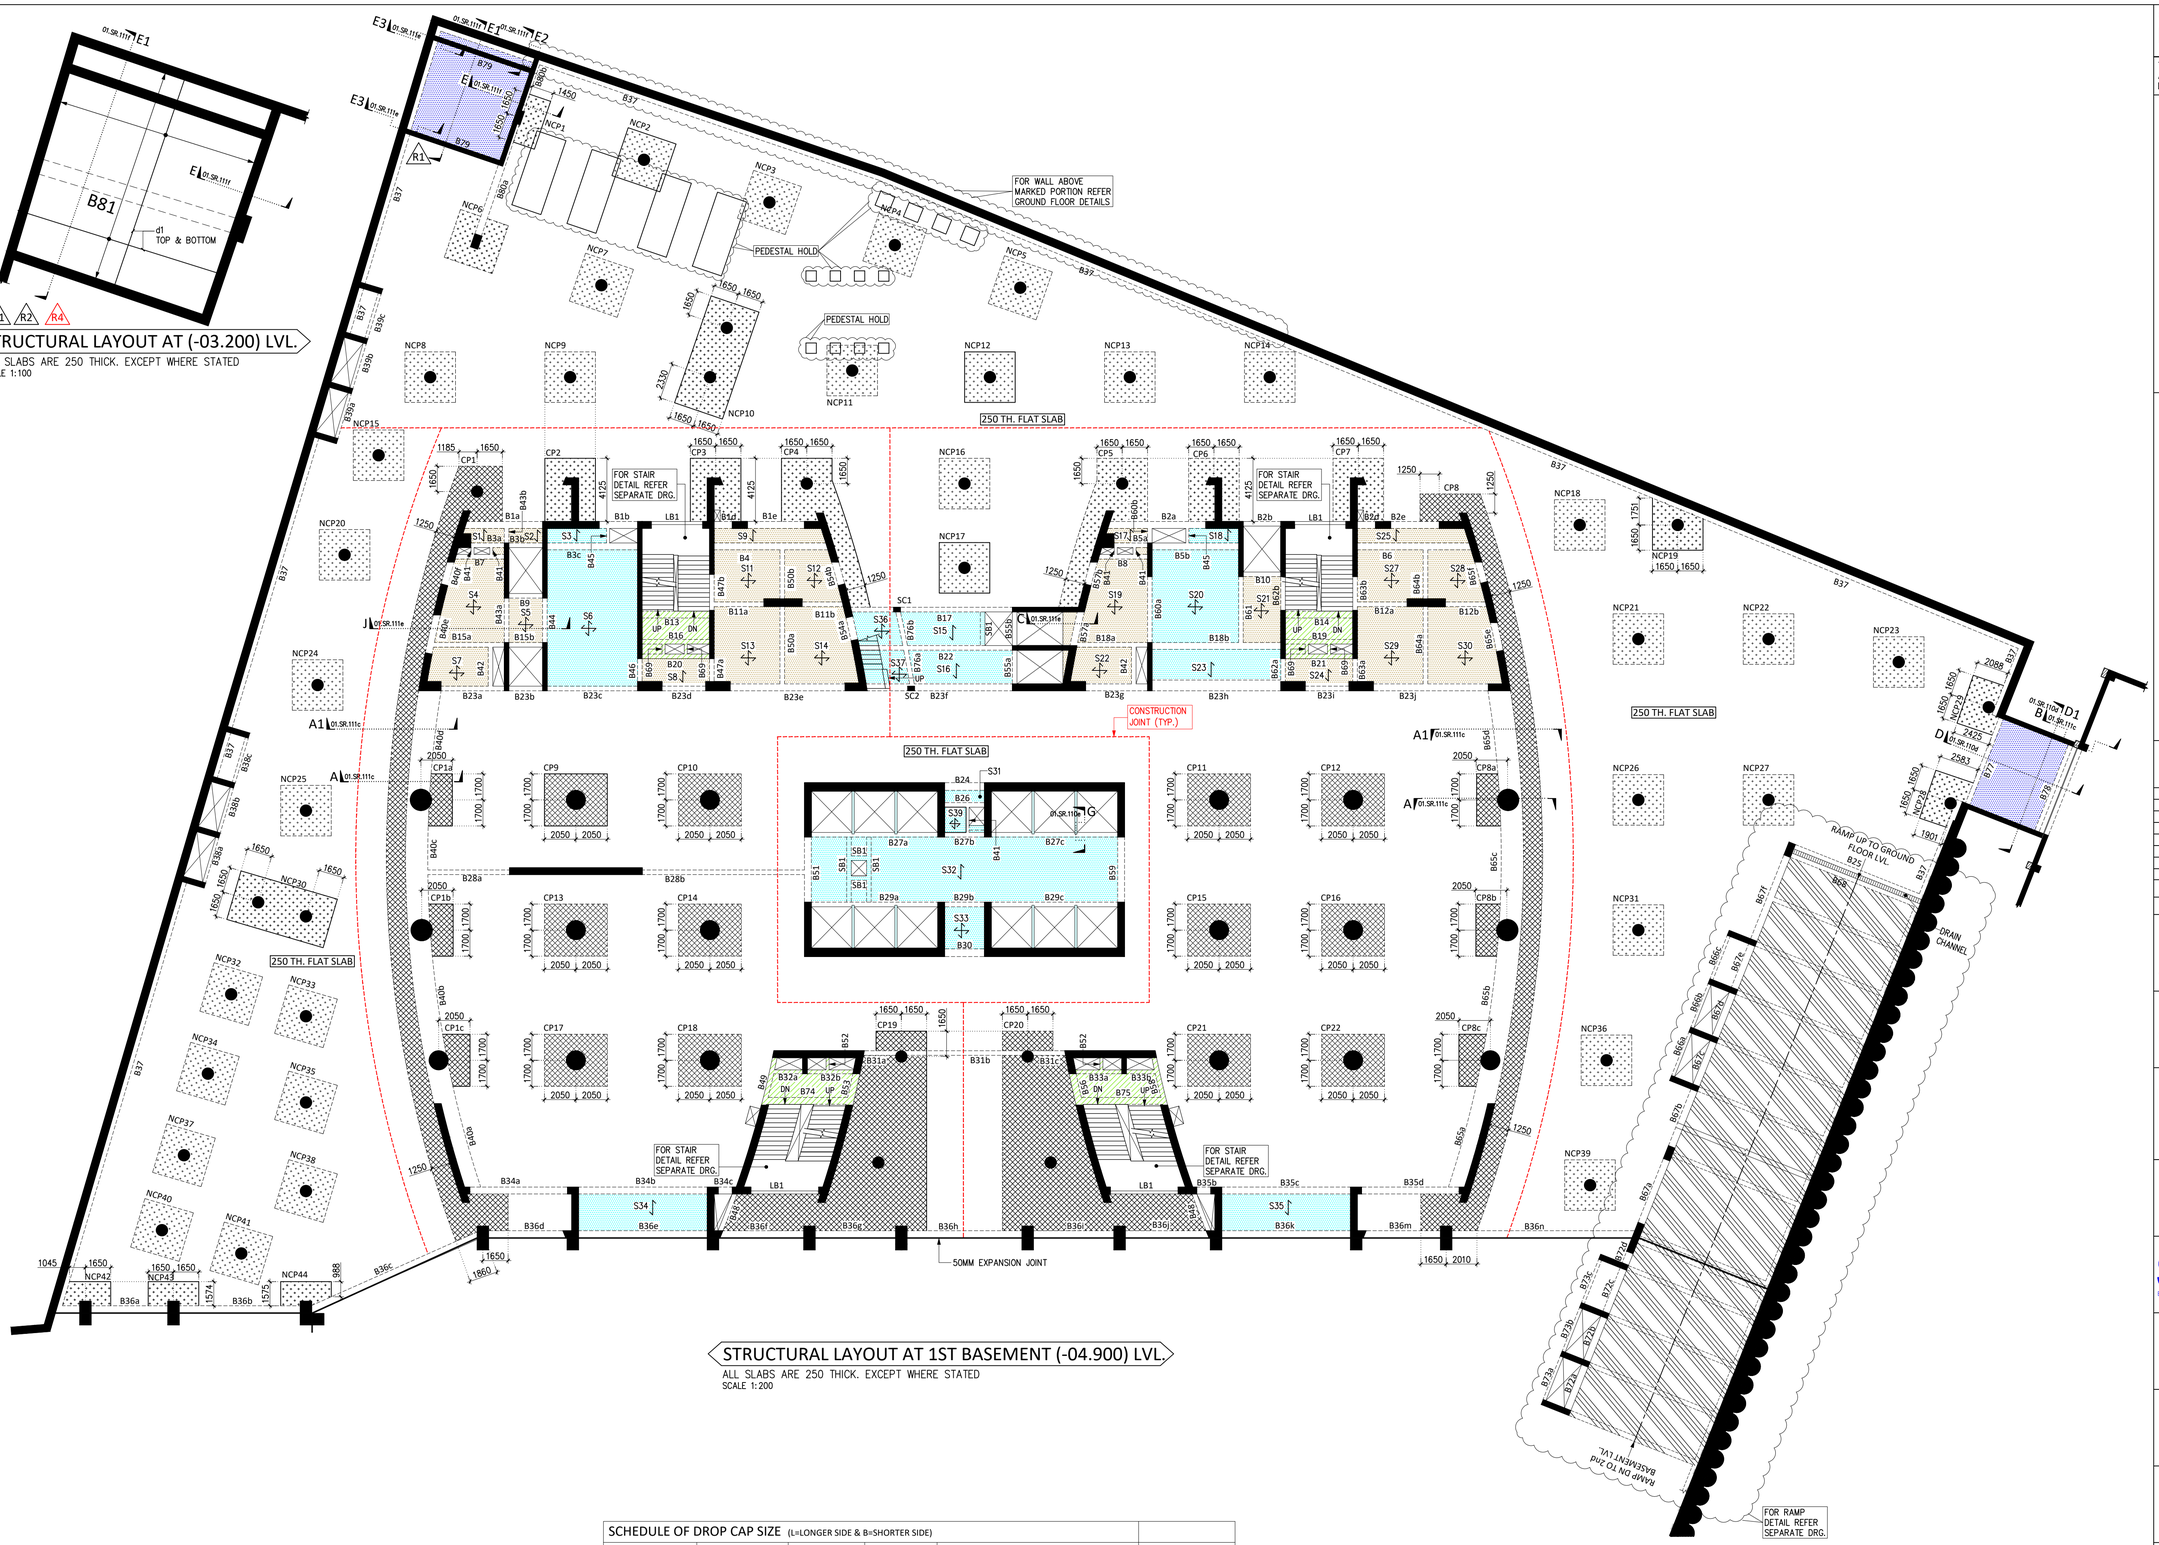

STRUCTURAL LAYOUT AT 1ST BASEMENT (-04.900) LVL.

ALL SLABS ARE 250 THICK. EXCEPT WHERE STATED
SCALE 1:200

SLAB SCHEDULE AT -4.900M LVL.							
SLAB MKD.	THK.	BOTTOM STEEL (CHIPYA)		TOP STEEL AT CONTINUOUS SUPPORT		REMARK	GRADE
		SHORT SPAN	LONG SPAN	SHORT SPAN	LONG SPAN		
S1,S2,S8,S9,S10,S17, S24,S25,S26	150	T8-100C/C	T8-200C/C	T8-100C/C	T8-200C/C	ONE WAY	M35
S4,S5,S7,S11,S12,S13,S14, S19,S21,S22, S27, S28,S29,S30	150	T8-100C/C	T8-100C/C	T8-100C/C	T8-100C/C	TWO WAY	M35
S15,S16,S23,S34,S35	200	T10-100C/C	T10-200C/C	T10-100C/C	T10-200C/C	ONE WAY	M35
S6,S20	200	T10-100C/C	T10-100C/C	T10-100C/C	T10-100C/C	TWO WAY	M35
S3,S18,S32	200	T10-100C/C	T10-100C/C	T10-100C/C	T10-100C/C	ONE WAY	M35
S31	200	T10-200C/C	T10-200C/C	T10-200C/C	T10-200C/C	ONEWAY	M35
S33,S39	200	T10-200C/C	T10-200C/C	T10-200C/C	T10-200C/C	TWO WAY	M35
S36,S37	200	T10-100C/C	T10-100C/C	T10-100C/C	T10-100C/C	TWO WAY	M35

SCHEDULE OF DROP CAP SIZE (L=LONGER SIDE & B=SHORTER SIDE)						
CAP NO.	CAP SIZE (mm) (L x B)	THICKNESS OF SLAB (mm)	THICKNESS OF CAP (mm)	BOTTOM STEEL		SHEAR LINKS
				ALONG 'L'	ALONG 'B'	
NCP1,NCP6 TO NCP9 NCP11 TO NCP18 NCP20,NCP24,NCP25 NCP31 TO NCP41	3300x3300	250	300	T12-200 C/C	T12-200 C/C	T10-200 C/C
NCP10,NCP19,NCP28, NCP29,NCP30,NCP42, NCP43,NCP44	AS PER LAYOUT	250	300	T12-200 C/C	T12-200 C/C	-----
NCP2 TO NCP5, NCP21,NCP22,NCP23, NCP26,NCP27	3300x3300	250	300	T12-200 C/C	T12-200 C/C	T10-200 C/C
CP1,CP1a,CP1b,CP1c, CP8,CP8a,CP8b,CP8c, CP19,CP20	AS PER LAYOUT	250	200	T12-200 C/C	T12-200 C/C	-----
CP2 TO CP7	AS PER LAYOUT	250	300	T12-200 C/C	T12-200 C/C	-----
CP9 TO CP18,CP21, CP22	4100x3400	250	200	T12-200 C/C	T12-200 C/C	-----

CLIENT DRAWING NO.

H-511R-C-111-R4

THIS DRAWING IS EXCLUSIVE PROPERTY OF "S3M DESIGN CONSULTANTS LLP" AND SHOULD NOT BE USED,COPIED,REPRODUCED AND EXHIBITED IN ANY WAY DETRIMENTAL TO OUR INTEREST WITHOUT OUR WRITTEN CONSENT.

NOTES

1. ALL DIMENSIONS AND LEVELS ARE IN MM, UNLESS OTHERWISE MENTIONED.
2. ALL STRUCTURE CONCRETE, UNLESS OTHERWISE SPECIFIED ON THE DRAWINGS, SHALL HAVE A MINIMUM 28 DAYS COMPRESSIVE STRENGTH (OF 150mm CUBE) NOT LESS THEN THE VALUE SPECIFIED BELOW :–

PILE & PILE CAP	:M30	COPING, LINTEL	:M30
FOOTING/RAFT	:M45	FLOOR BEAM	:M35
PEDESTAL,COLUMN, SHEAR WALL	M55/M50/M45/M40/ M35/M30	FLOOR SLAB	:M35
		STAIR	:M35
PLINTH BEAM	:M35	U.G. WATER TANK	:M35
GRADE SLAB	:M25		

3. T – INDICATES HIGH YIELD STRENGTH DEFORMED BARS CONFIRMING TO IS:1786 OR EQUIVALENT WITH 0.2% PROOF STRESS OF 500 N/mm² (Fe 500D).
4. LAP LENGTH FOR REINFORCEMENT (Fe=500D N/mm²).

Ld = 57xD FOR M20 CONCRETE	Ld = 38xD FOR M40 CONCRETE
Ld = 49xD FOR M25 CONCRETE	Ld = 38xD FOR M45 CONCRETE
Ld = 46xD FOR M30 CONCRETE	Ld = 38xD FOR M50 CONCRETE
Ld = 40xD FOR M35 CONCRETE	Ld = 38xD FOR M55 CONCRETE

5. FOR ALL OTHER NOTES & DETAILS REFER DRG. NO. GN.SR.01 & 01a.

LEGEND:-

- 200MM THK. CONVENTIONAL SLAB
- 150MM THK. CONVENTIONAL SLAB
- 250MM THK. CONVENTIONAL SLAB
- 250MM THK. FLAT SLAB
- 550MM THK. DROP AREA/M30 GRADE CONCRETE (250MM FLAT SLAB + 300MM DROP)
- 450MM THK. DROP AREA/M30 GRADE CONCRETE (250MM FLAT SLAB + 200MM DROP)
- SLAB & BEAM IN RAMP PROFILE
- BEAM & SLAB –04.725 LVL.
- CUTOUT

GOOD FOR CONSTRUCTION

DATE	REVISION	REV. NO.
19.06.2023	REVISED AS MARKED	R4
02.03.2023	NO REVISION IN DRAWING	R3
22.02.2023	REVISED AS MARKED	R2
13.02.2023	REVISED AS MARKED	R1
04.01.2023	ISSUED FOR CONSTRUCTION	RO

ISSUE DATE

PROJECT

ENERGY BUILDING,
AT SHANTIGRAM, AHMEDABAD

CLIENT

adani

LEAD ARCHITECT'S

ARCHGROUP INTERNATIONAL
ARCHITECTS . PLANNERS . ENGINEERS.
THE MART, 8th FLOOR, 29 SHIVAJI NAGAR MARG, DADAR (W).
Pin Code: 400 028 Tel: +91 - 22 -4100 7100
DUBAI - MUMBAI

ARCHITECT OF RECORD

STRUCTURAL CONSULTANT

S3M DESIGN CONSULTANTS LLP
D-1607 TO 1611, WESTGATE, NEAR YMCA CLUB,
S G HIGHWAY, AHMEDABAD-15.
PHONE: +91 (079) 66118122/66118123/48488122
W: www.s3mconsultants.com , E: s3m@s3mconsultants.com

MEP CONSULTANT

PDA Pankaj Dharkar & Associates
MEP & Green Building Consultants

DRAWING

BUILDING-E1
STRUCTURAL LAYOUT AT
1ST BASEMENT (-04.900) LVL.

SCALE 1 : 200	JOB NO. 2203		NORTH
DATE 04.01.2023			
DRN. BY	CHKD BY	DRG NO	
RUTVIK	HIRAVA SHASHIN	01.SR.111	R-04