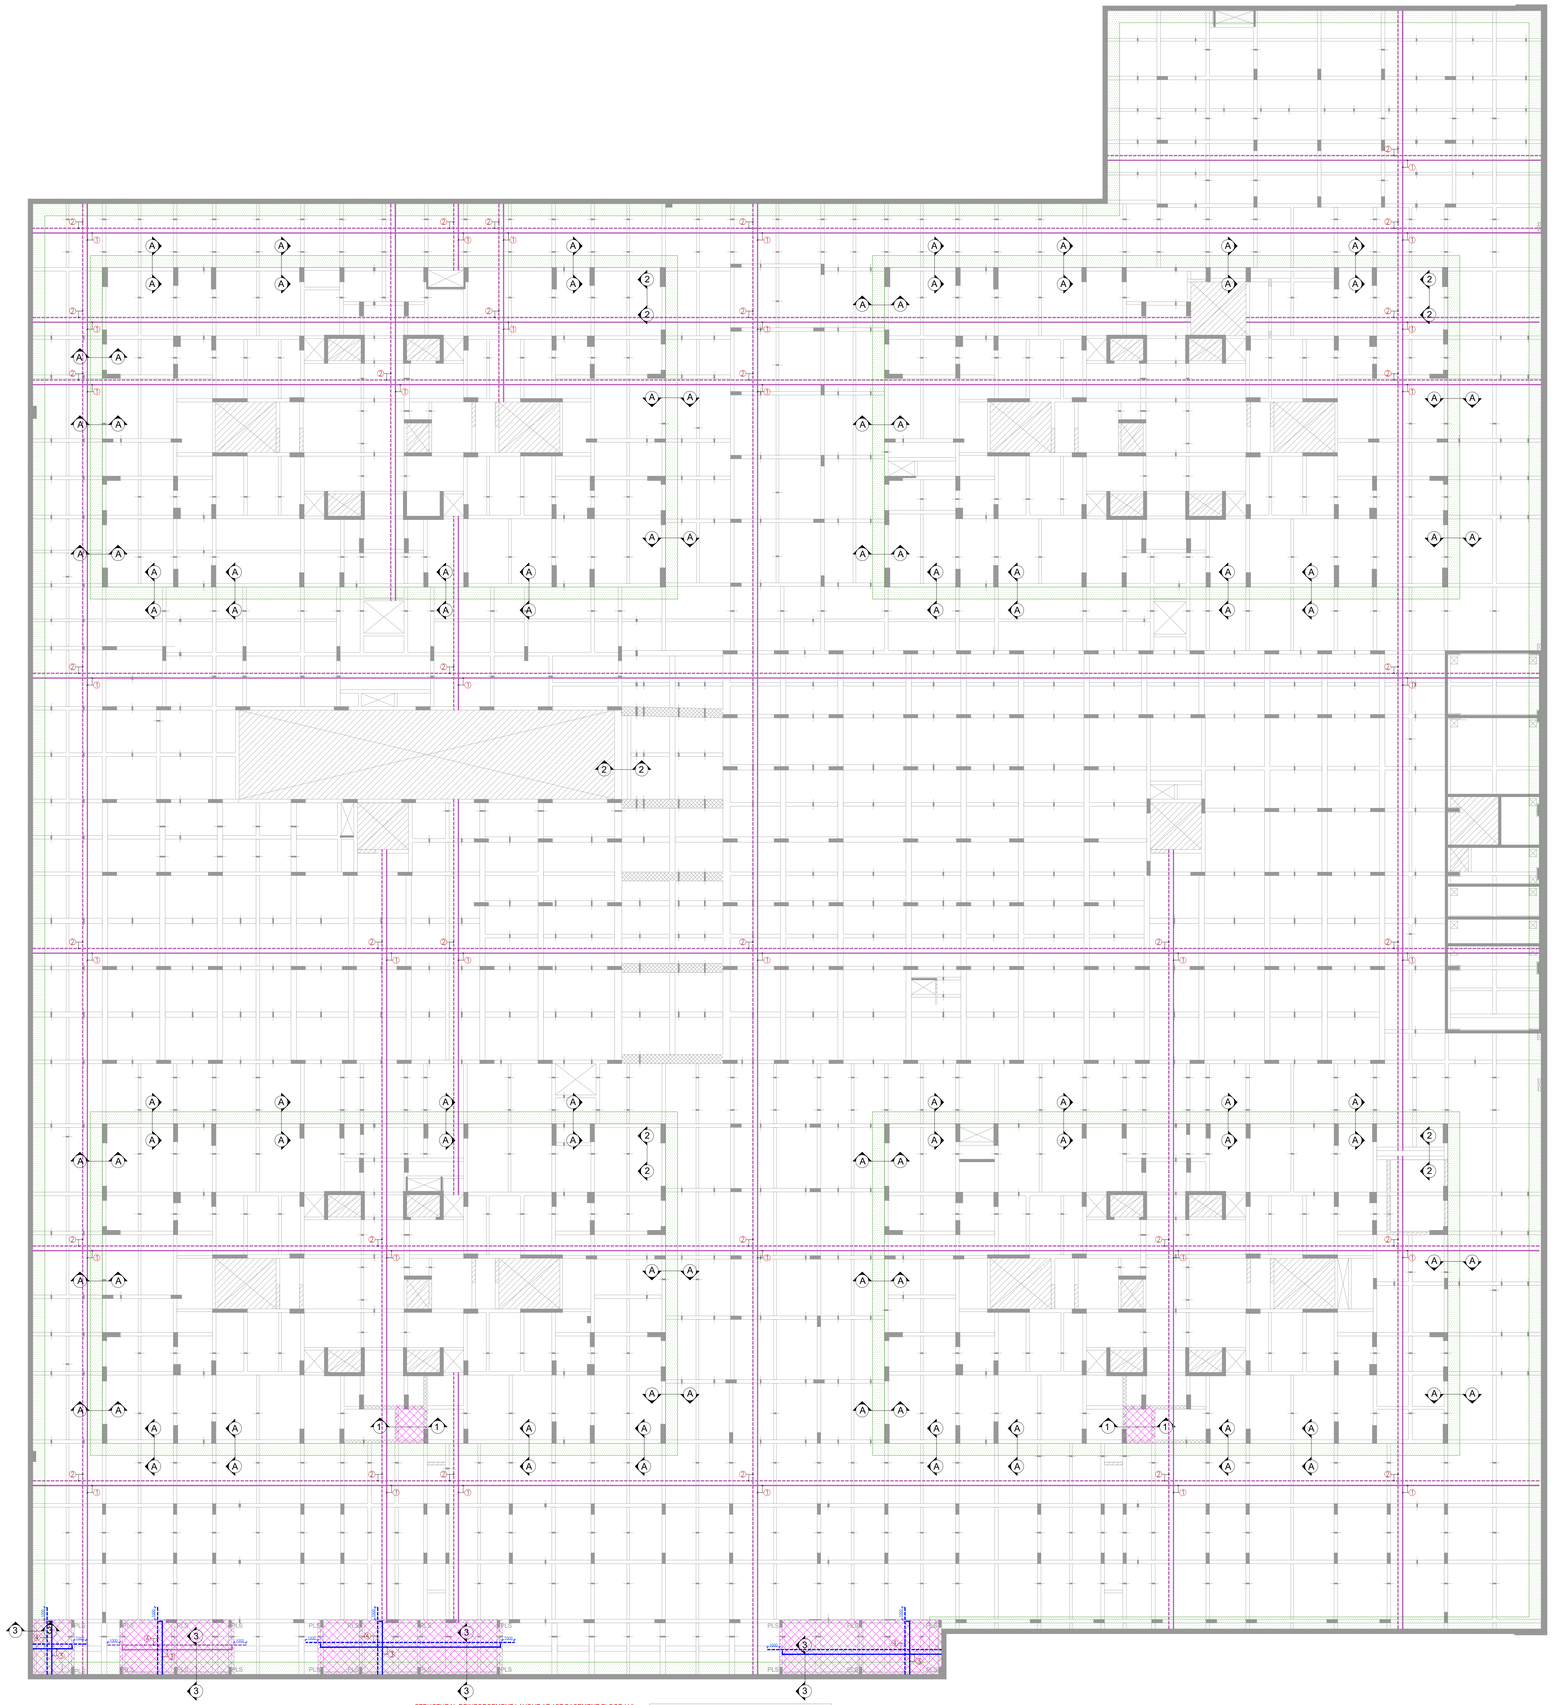

STRUCTURAL REINFORCEMENT LAYOUT AT 1ST BASEMENT FLOOR LVL.

NOTE:- * ALL CENTER LINE DIMENSIONS & LOCATION REFER ARCH. DWG.
* ALL SLABS ARE 150THK. UNLESS OTHERWISE SPECIFIED.
MARKED AREA TOP EXTRA.(DETAILS AS/SECTION).
MARKED AREA 200MM THK SLAB.

SLAB REINFORCEMENT SCHEDULE.

1 T8 @ 100 c/c BOTTOM THRU MESH.
2 T8 @ 200 c/c TOP THRU MESH.
3 T10 @ 100 c/c BOTTOM THRU MESH.
4 T10 @ 100 c/c TOP THRU MESH.
5 T10 @ 200 c/c EXTRA TOP ALT WITH THRU MESH.

NOTE: ALL SLAB REINFORCEMENT LAP IS 100D.

1. ALL DIMENSIONS AND LEVELS ARE IN MM.
2. T – INDICATES TMT HIGH YIELD STRENGTH DEFORMED BARS CONFIRMING TO IS:1786 OR EQUIVALENT WITH 0.2% PROOF STRESS OF 550 N/mm².
3. ALL DIMENSIONS & LEVELS SHALL BE CHECKED WITH ARCHITECTURAL DRAWINGS. ANY AMBIGUITY, IF FOUND, SHALL BE BROUGHT TO THE NOTICE
4. OF THE CONSULTANTS BEFORE EXECUTION OF THE WORK.
5. SUPERVISION SHALL NOT BE OUR RESPONSIBILITY.
6. CURING OF CONCRETE MEMBERS SHALL BE CARRIED OUT FOR A MINIMUM PERIOD OF 12 DAYS AFTER CASTING BY PONDING OR COVERING SURFACE BY JUTE BAGS KEPT CONSTANTLY WET OR SUCH OTHER MEANS.
7. CONTRACTOR SHALL TAKE CARE OF ALL UNDER GROUND UTILITIES OF CIVIL, MECHANICAL, ELECTRICAL AND OTHER SERVICES AS THEY
8. INTERFACE WITH STRUCTURAL FOUNDATIONS AND OTHER UNDERGROUND WORKS.
9. SAND/EARTH FILLING SHALL BE DONE SIMULTANEOUSLY BOTH SIDE OF WALL.
10. LAP LENGTH SHALL BE 50 TIMES DIA. OF BARS.

KEY PLAN

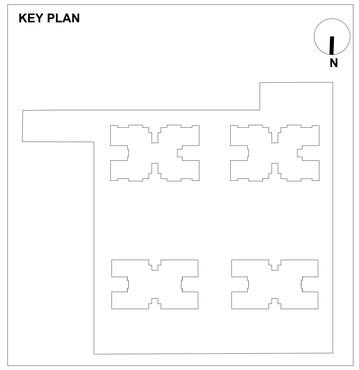

GOOD FOR CONSTRUCTION
ISSUED ON DATE:19/03/2025

GRADE OF CONCRETE MIX= M35
GRADE OF STEEL= FE550D

PRINTS ISSUED

DATE	REV.	ARCH	CLIENT	SITE	CONSL.	CONTR.	OFFICE	TOTAL	REMARK
10.03.2025	R0	MAIL	–	–	–	–	01	01	APP.
19.03.2025	R0	MAIL	–	–	–	–	01	01	GFC.

NO	DATE	REVISION	BY	DR	CH

ARCHITECT :

mansi shah ARCHITECTS

JOB TITLE
TROGON CENTRE COURT

DRAWING TITLE
STRUCTURAL R/F LAYOUT AT 1ST BASEMENT LVL.

JOB NO	DATE	SHEET SIZE	SCALE	
2209028	11.01.2024	A0	1:180	
DRG. NO.	REVISION	DRAWN	DESIGN	CHECKED
S-301.1	R0	RS	RS/KN	NKP

STRUCTURAL CONSULTANT

HNBS DESIGN STUDIO

1007, TIMES SQUARE ARCADE 1,
NEAR RAVIJA PLAZA,OPPOSITE
RAMBAG,THALTEJ,SHILAJ,
AHMEDABAD, 380059,
E mail: contact@hnbs.co.in